




# 1108-T Series 中型 日式輪系列

● 轉動靈活寧靜，特有定向功能，可在固定與萬向間、或萬向與剎車間隨意調整輪子類型，使單顆腳輪起到數種功能。


○ Easy swivel, quiet operation. Specially designed Direction Lock provides various operation choices of locking direction only, locking wheels only, and locking both wheel and swivel direction.

載重 Load  
110-160 kg

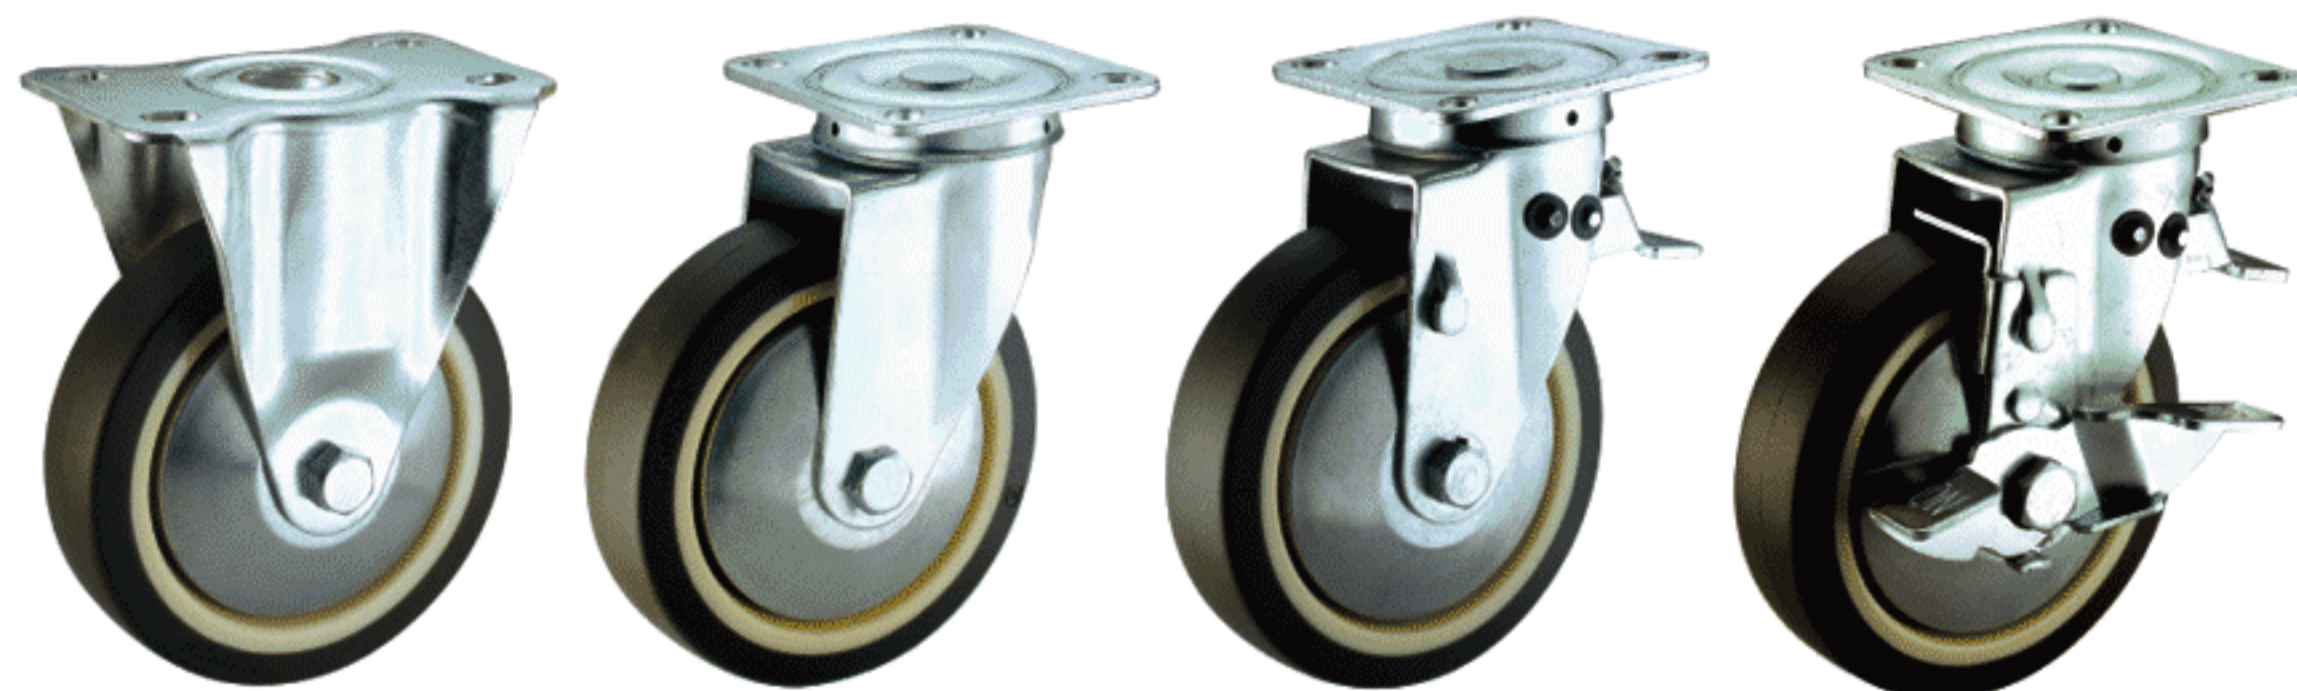

### ▶▶ 特色區 Features

### ▶▶ 輪子選項 Wheel Options

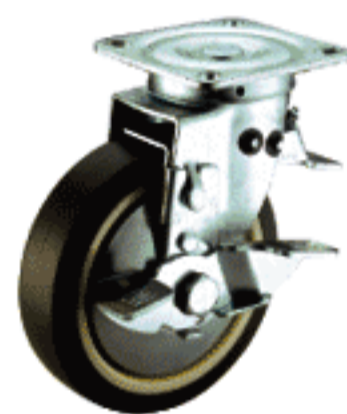


側剎  
Side Lock Brake



定向剎  
Directional Lock Brake



高科技耐磨聚氨酯(尼龍芯)  
PU on PA Core

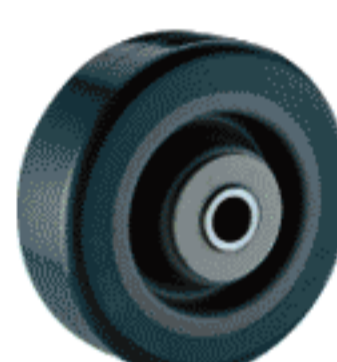

高科技耐磨聚氨酯  
PU on PP Core



鐵芯日式橡膠輪  
Rubber on Steel Core



鋁芯日式橡膠輪  
Rubber on Aluminum Core



尼龍輪  
Nylon



滾珠軸承  
Ball Bearing

### ▶▶ 活動底板規格 SWIVEL TOP PLATE SIZE AND BOLT HOLE SPACING

腳輪尺寸 Caster Size	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安裝尼帽尺寸 Attaching Bolt Size
4"活動底板 4" Swivel plate	92 x 92 mm (3-5/8"x 3-5/8")	70 x 70 mm (2-3/4"x 2-3/4")	8 mm (5/16")
5", 6"活動底板 5", 6" Swivel plate	101x101 mm (4"x 4")	78 x 78 mm (3-1/16"x 3-1/16")	10 mm (3/8")

### ▶▶ 固定底板規格 RIGID TOP PLATE SIZE AND BOLT HOLE SPACING

腳輪尺寸 Caster Size	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安裝尼帽尺寸 Attaching Bolt Size
4"固定底板 4" Rigid plate	83 x 120 mm (3-1/4"x 4-3/4")	48 x 85 mm (1-7/8"x 3-5/16")	8 mm (5/16")
5", 6"固定底板 5", 6" Rigid plate	91 x 140 mm (3-9/16"x 5-1/2")	55 x 105 mm (2-1/8"x 4-1/8")	10 mm (3/8")

輪徑×輪寬 Diameter×Width	載重 Load	材質 Material	型號 Item No.			軸承 Bearing	總高 Overall Height
			固定 Fixed	活動 Swivel	剎車 Brake		
100mm×36mm (4"x1-1/4")	110 kgs (240 lbs)	高科技耐磨聚氨酯 PU on PP Core	1108-04-31-1-T	1108-04-31-2-T	1108-04-31-4-T	滾珠 Ball Bearing	130mm (5-1/8")
	110 kgs (240 lbs)	鐵芯日式橡膠輪 Rubber on Steel Core	1108-04-18-1-T	1108-04-18-2-T	1108-04-18-4-T		
	120 kgs (260 lbs)	尼龍輪 Nylon	1108-04-07-1-T	1108-04-07-2-T	1108-04-07-4-T		
125mm×38mm (5"x1-1/2")	130 kgs (285 lbs)	高科技耐磨聚氨酯 PU on PP Core	1108-05-31-1-T	1108-05-31-2-T	1108-05-31-4-T	滾珠 Ball Bearing	167mm (6-9/16")
	150 kgs (330 lbs)	鋁芯日式橡膠輪 Rubber on Aluminum Core	1108-05-18-1-T	1108-05-18-2-T	1108-05-18-4-T		
	150 kgs (330 lbs)	尼龍輪 Nylon	1108-05-07-1-T	1108-05-07-2-T	1108-05-07-4-T		
150mm×38mm (6"x1-1/2")	150kgs (330 lbs)	高科技耐磨聚氨酯(尼龍芯) PU on PA Core	1108-06-34-1-T	1108-06-34-2-T	1108-06-34-4-T	滾珠 Ball Bearing	190mm (7-7/16")
	160 kgs (350 lbs)	鐵芯日式橡膠輪 Rubber on Steel Core	1108-06-18-1-T	1108-06-18-2-T	1108-06-18-4-T		
	160 kgs (350 lbs)	尼龍輪 Nylon	1108-06-07-1-T	1108-06-07-2-T	1108-06-07-4-T		