



1122-T Series 中重型 中重負載系列

- 支架一體成型，流線美觀，堅固耐用，荷重高，適用於講究美觀、又強調荷重的環境。
- Pressed steel yoke with good outlook and added strength; ideal for application requiring both aesthetic and heavy load.

載重 Load
150-250 kg



特色區 Features



中剎
Center Lock Brake




側剎
Side Lock Brake



輪子可附防塵蓋
Tread guard

輪子選項 Wheel Options

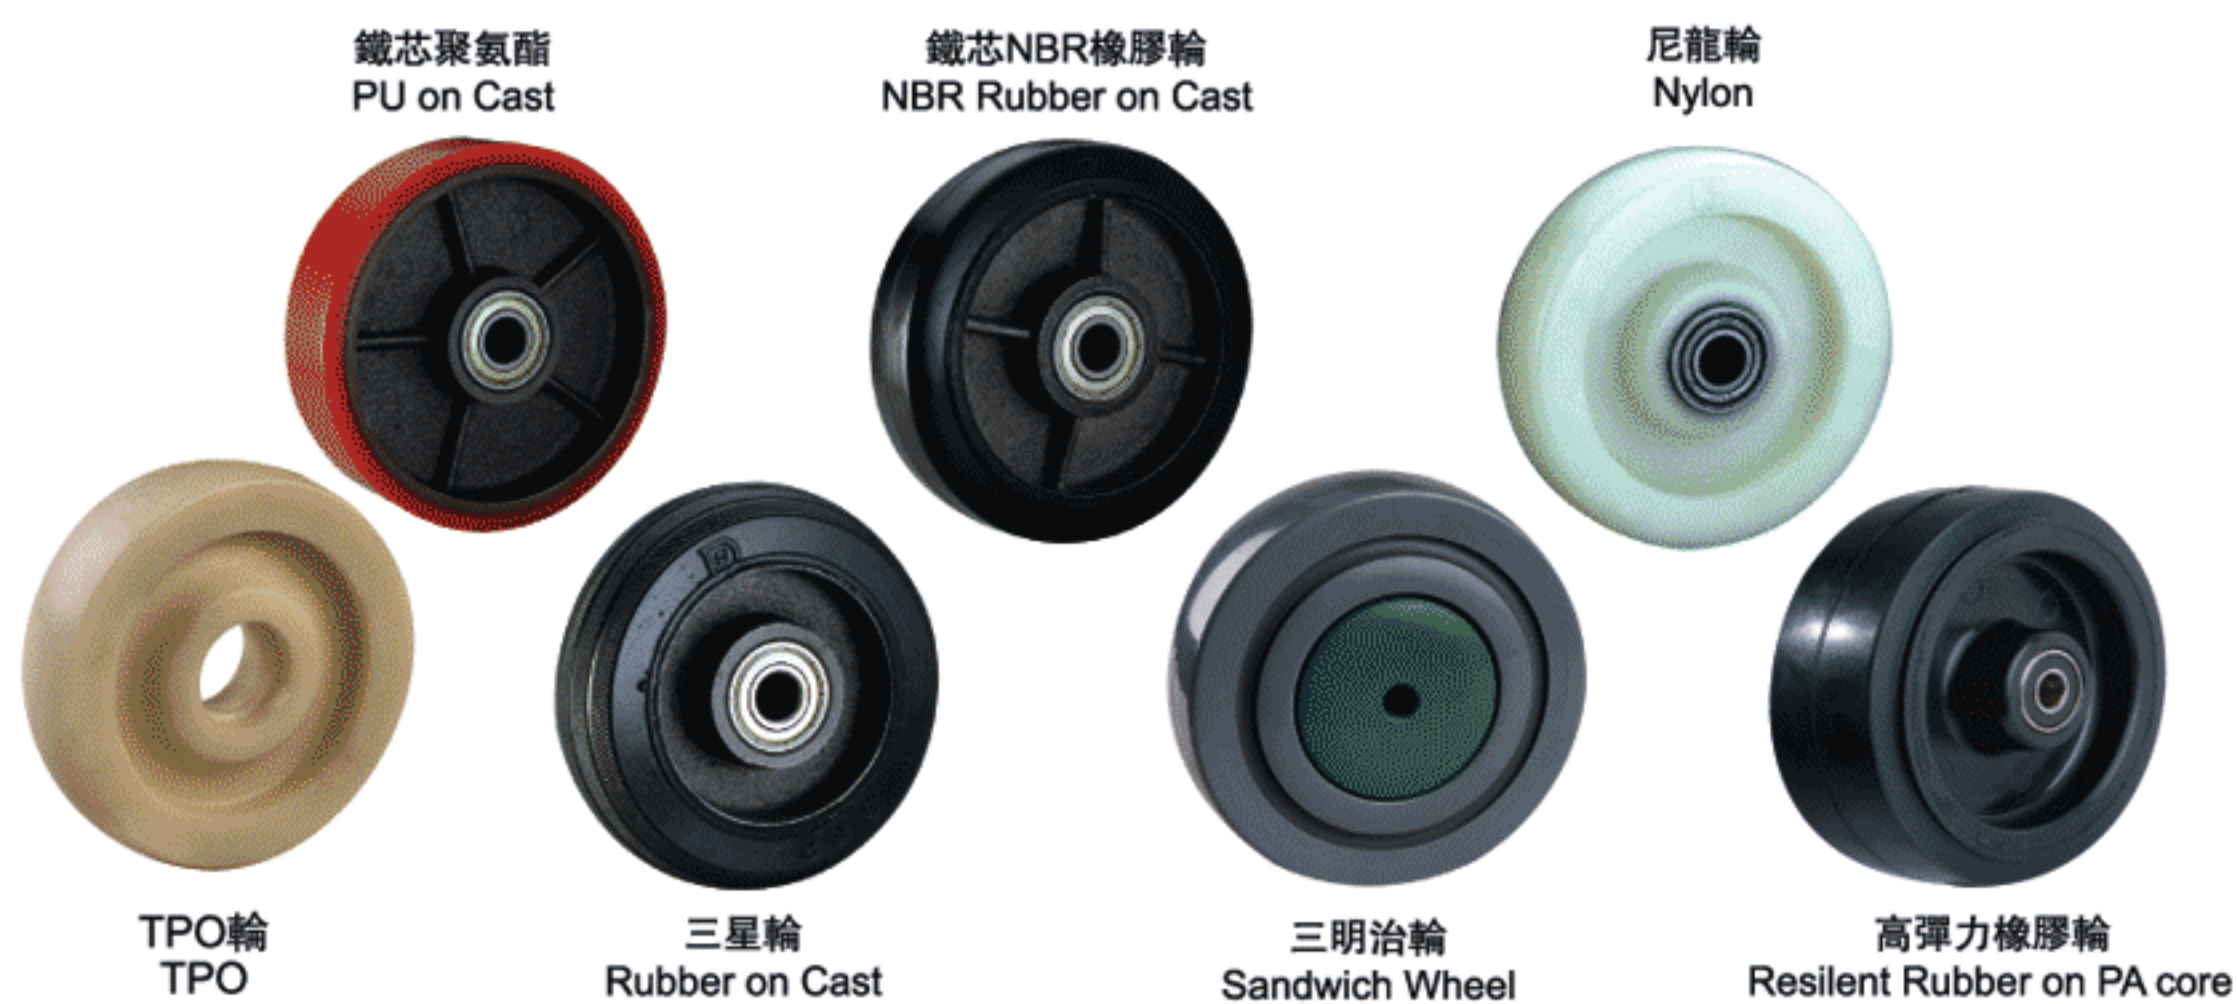

底板規格 TOP PLATE SIZE AND BOLT HOLE SPACING

編號 Suffix	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安裝尼帽尺寸 Attaching Bolt Size
1	100 x 115 mm (4" x 4-1/2")	75 x 80 mm (2-5/8"~3"x3~3-5/8")	9.5 mm (3/8")



輪徑×輪寬 Diameter×Width	載重 Load	材質 Material	型號 Item No.			軸承 Bearing	總高 Overall Height
			固定 Fixed	活動 Swivel	剎車 Brake		
100mm×38mm (4"×1-1/2")	200 kgs (440 lbs)	鐵芯聚氨酯 PU on Cast	1122-04-33-1-T	1122-04-33-2-T	1122-04-33-4-T	滾珠 Ball Bearing	167mm (6-9/16")
	150 kgs (330 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1122-04-04-1-T	1122-04-04-2-T	1122-04-04-4-T		
	200 kgs (440 lbs)	尼龍輪 Nylon	1122-04-07-1-T	1122-04-07-2-T	1122-04-07-4-T		
	150 kgs (330 lbs)	TPO輪 TPO	1122-04-41-1-T	1122-04-41-2-T	1122-04-41-4-T		
	150 kgs (330 lbs)	高彈力橡膠輪 Resilient Rubber on PA core	1122-04-10-1-T	1122-04-10-2-T	1122-04-10-4-T		
	150 kgs (330 lbs)	三星輪 Rubber on Cast	1122-04-03-1-T	1122-04-03-2-T	1122-04-03-4-T		
125mm×38mm (5"×1-1/2")	220 kgs (485 lbs)	鐵芯聚氨酯 PU on Cast	1122-05-33-1-T	1122-05-33-2-T	1122-05-33-4-T	滾珠 Ball Bearing	192mm (7-1/2")
	170 kgs (375 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1122-05-04-1-T	1122-05-04-2-T	1122-05-04-4-T		
	220 kgs (485 lbs)	尼龍輪 Nylon	1122-05-07-1-T	1122-05-07-2-T	1122-05-07-4-T		
	170 kgs (375 lbs)	TPO輪 TPO	1122-05-41-1-T	1122-05-41-2-T	1122-05-41-4-T		
	170 kgs (375 lbs)	高彈力橡膠輪 Resilient Rubber on PA core	1122-05-10-1-T	1122-05-10-2-T	1122-05-10-4-T		
	250 kgs (550 lbs)	三明治輪 Sandwich Wheel	1122-05-40-1-T	1122-05-40-2-T	1122-05-40-4-T		
	170 kgs (375 lbs)	三星輪 Rubber on Cast	1122-05-03-1-T	1122-05-03-2-T	1122-05-03-4-T		
150mm×42mm (6" x1-5/8")	240 kgs (525 lbs)	鐵芯聚氨酯 PU on Cast	1122-06-33-1-T	1122-06-33-2-T	1122-06-33-4-T	滾珠 Ball Bearing	242mm (9-9/16")
	190 kgs (415 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1122-06-04-1-T	1122-06-04-2-T	1122-06-04-4-T		
	240 kgs (525 lbs)	尼龍輪 Nylon	1122-06-07-1-T	1122-06-07-2-T	1122-06-07-4-T		
	190 kgs (415 lbs)	TPO輪 TPO	1122-06-41-1-T	1122-06-41-2-T	1122-06-41-4-T		
	190 kgs (415 lbs)	高彈力橡膠輪 Resilient Rubber on PA core	1122-06-10-1-T	1122-06-10-2-T	1122-06-10-4-T		
	190 kgs (415 lbs)	三星輪 Rubber on Cast	1122-06-03-1-T	1122-06-03-2-T	1122-06-03-4-T		

