




# 1115-L Series 特輕彈簧輪系列 Light Duty Spring-loaded Caster

- 屬得勝專利產品，高避震力，針對電子產業與需要高度防震產品市場。
- Institutional version of spring-loaded caster. Ideal for chip industry and tool cart.

載重 Load  
60-70 kg

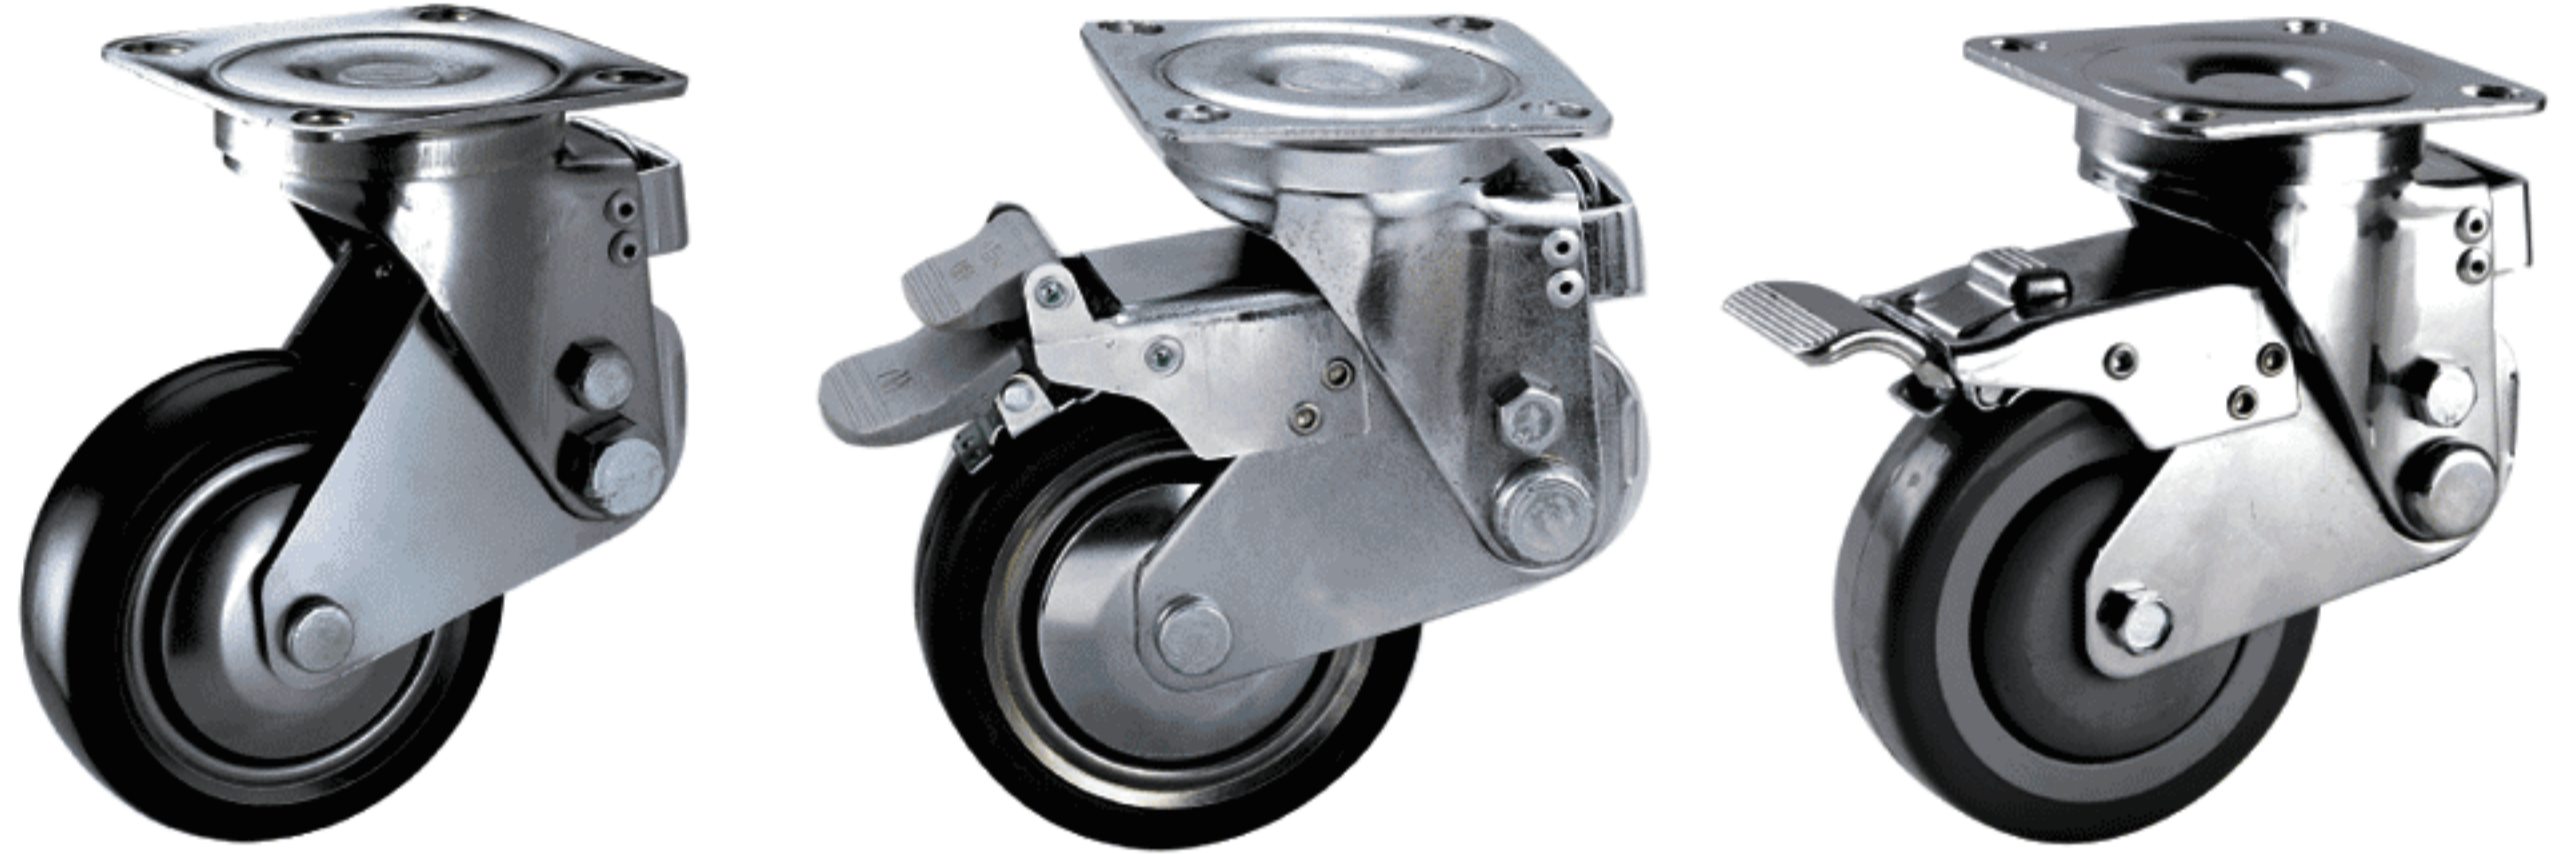

## ▶ 特色區 Features



鋁制  
Total Lock Brake  
with Aluminum Alloy Pedal



尼龍雙踏板  
Total Lock Brake  
with Dual Nylon Pedals




輪子可附防塵蓋  
Thread guard

## ▶ 輪子選項 Wheel Options



導電輪  
E-Conductive

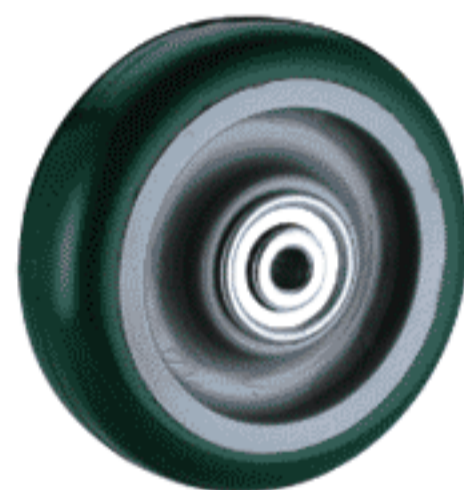

高科技耐磨聚氨酯  
PU on PP Core



超級人造膠  
TPR on PP Core



A珠軸承  
Flanged Ball Bearing

## ▶ 底板規格 TOP PLATE SIZE AND BOLT HOLE SPACING

腳輪尺寸 Caster Size	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安裝尼帽尺寸 Attaching Bolt Size
4", 5"	91 x 91 mm (3-9/16"x 3-9/16")	68 x 68 mm (2-11/16"x 2-11/16")	10 mm (3/8")

輪徑×輪寬 Diameter×Width	載重 Load	材質 Material	型號 Item No.			軸承 Bearing	總高 Overall Height
			固定 Fixed	活動 Swivel	剎車 Brake		
100mm×32mm (4"×1-1/4")	60 kgs (130 lbs)	高科技耐磨聚氨酯 PU on PP Core	--	1115-04-31-2-L	1115-04-31-4-L	A珠軸承 Flanged Ball Bearing	158mm (6-3/16")
	60 kgs (130 lbs)	超級人造膠 TPR on PP Core	--	1115-04-26-2-L	1115-04-26-4-L		
	60 kgs (130 lbs)	導電輪 E-Conductive	--	1115-04-17-2-L	1115-04-17-4-L		
125mm×32mm (5"×1-1/4")	70 kgs (150 lbs)	高科技耐磨聚氨酯 PU on PP Core	--	1115-05-31-2-L	1115-05-31-4-L	A珠軸承 Flanged Ball Bearing	187 mm (7-1/4")
	70 kgs (150 lbs)	超級人造膠 TPR on PP Core	--	1115-05-26-2-L	1115-05-26-4-L		
	70 kgs (150 lbs)	導電輪 E-Conductive	--	1115-05-17-2-L	1115-05-17-4-L		