



# 1122-T Series 中重型 中重負載系列

- 支架一體成型，流線美觀，堅固耐用，荷重高，適用於講究美觀、又強調荷重的環境。
- Pressed steel yoke with good outlook and added strength; ideal for application requiring both aesthetic and heavy load.

載重 Load  
150-250 kg



## 特色區 Features



中剎  
Center Lock Brake




側剎  
Side Lock Brake



輪子可附防塵蓋  
Tread guard

## 輪子選項 Wheel Options

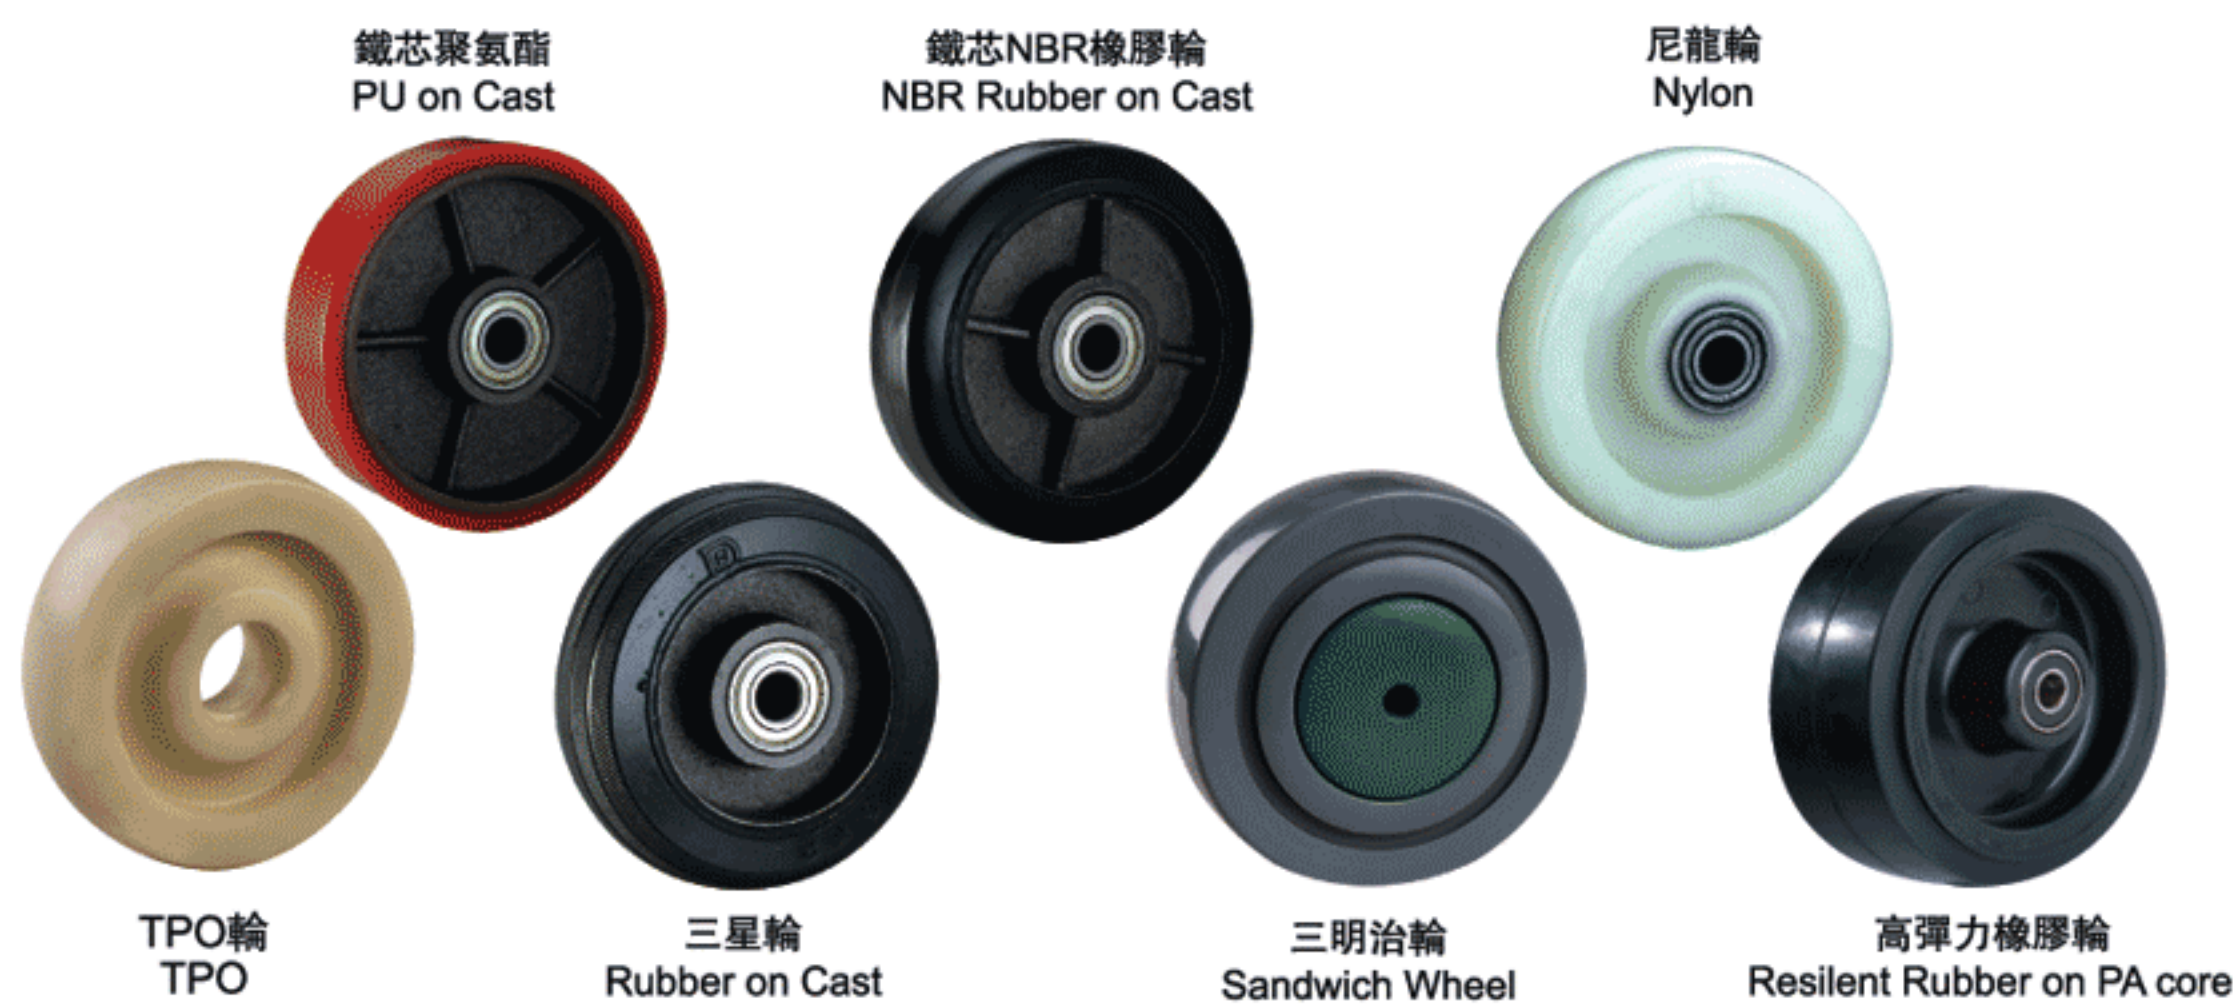

## 底板規格 TOP PLATE SIZE AND BOLT HOLE SPACING

編號 Suffix	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安裝尼帽尺寸 Attaching Bolt Size
1	100 x 115 mm (4" x 4-1/2")	75 x 80 mm (2-5/8"~3"x3~3-5/8")	9.5 mm (3/8")



輪徑×輪寬 Diameter×Width	載重 Load	材質 Material	型號 Item No.			軸承 Bearing	總高 Overall Height
			固定 Fixed	活動 Swivel	剎車 Brake		
100mm×38mm (4"×1-1/2")	200 kgs (440 lbs)	鐵芯聚氨酯 PU on Cast	1122-04-33-1-T	1122-04-33-2-T	1122-04-33-4-T	滾珠 Ball Bearing	167mm (6-9/16")
	150 kgs (330 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1122-04-04-1-T	1122-04-04-2-T	1122-04-04-4-T		
	200 kgs (440 lbs)	尼龍輪 Nylon	1122-04-07-1-T	1122-04-07-2-T	1122-04-07-4-T		
	150 kgs (330 lbs)	TPO輪 TPO	1122-04-41-1-T	1122-04-41-2-T	1122-04-41-4-T		
	150 kgs (330 lbs)	高彈力橡膠輪 Resilient Rubber on PA core	1122-04-10-1-T	1122-04-10-2-T	1122-04-10-4-T		
	150 kgs (330 lbs)	三星輪 Rubber on Cast	1122-04-03-1-T	1122-04-03-2-T	1122-04-03-4-T		
125mm×38mm (5"×1-1/2")	220 kgs (485 lbs)	鐵芯聚氨酯 PU on Cast	1122-05-33-1-T	1122-05-33-2-T	1122-05-33-4-T	滾珠 Ball Bearing	192mm (7-1/2")
	170 kgs (375 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1122-05-04-1-T	1122-05-04-2-T	1122-05-04-4-T		
	220 kgs (485 lbs)	尼龍輪 Nylon	1122-05-07-1-T	1122-05-07-2-T	1122-05-07-4-T		
	170 kgs (375 lbs)	TPO輪 TPO	1122-05-41-1-T	1122-05-41-2-T	1122-05-41-4-T		
	170 kgs (375 lbs)	高彈力橡膠輪 Resilient Rubber on PA core	1122-05-10-1-T	1122-05-10-2-T	1122-05-10-4-T		
	250 kgs (550 lbs)	三明治輪 Sandwich Wheel	1122-05-40-1-T	1122-05-40-2-T	1122-05-40-4-T		
	170 kgs (375 lbs)	三星輪 Rubber on Cast	1122-05-03-1-T	1122-05-03-2-T	1122-05-03-4-T		
150mm×42mm (6" x1-5/8")	240 kgs (525 lbs)	鐵芯聚氨酯 PU on Cast	1122-06-33-1-T	1122-06-33-2-T	1122-06-33-4-T	滾珠 Ball Bearing	242mm (9-9/16")
	190 kgs (415 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1122-06-04-1-T	1122-06-04-2-T	1122-06-04-4-T		
	240 kgs (525 lbs)	尼龍輪 Nylon	1122-06-07-1-T	1122-06-07-2-T	1122-06-07-4-T		
	190 kgs (415 lbs)	TPO輪 TPO	1122-06-41-1-T	1122-06-41-2-T	1122-06-41-4-T		
	190 kgs (415 lbs)	高彈力橡膠輪 Resilient Rubber on PA core	1122-06-10-1-T	1122-06-10-2-T	1122-06-10-4-T		
	190 kgs (415 lbs)	三星輪 Rubber on Cast	1122-06-03-1-T	1122-06-03-2-T	1122-06-03-4-T		

