



# 1150 Series

## Medium Duty General Purposes Caster (European Style)

- Pressed steel caster horn/ housing design for European market. Swivel easily with high performance total lock brake, suitable for medium and light duty logistic equipment.

Load  
80-250 kg



### » Features



Total Lock Brack




Swivel Dust Cover



Ball Bearing

Roller Bearing

### » Wheel Options

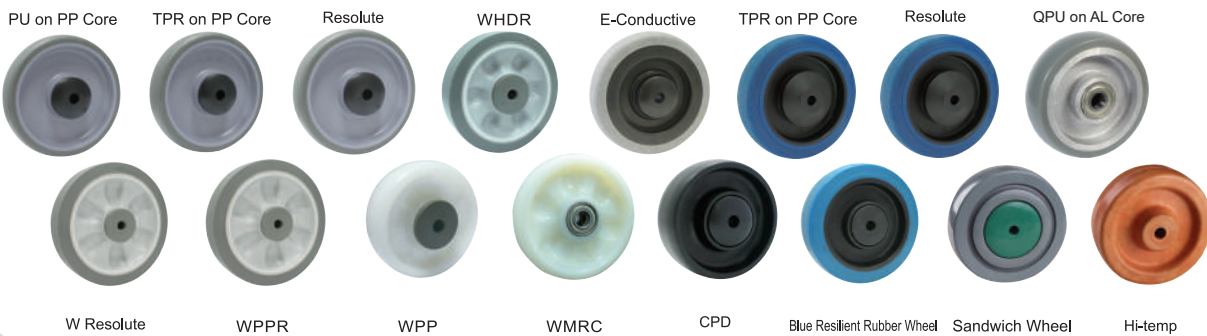








### » TOP PLATE SIZE AND BOLT HOLE SPACING

Suffix	Top Plate Size	Bolt Hole Spacing	Attaching Bolt Size
1	80 x 105 mm (3-1/2" x 4-1/8")	60x80 mm 2-3/8"x3-1/8"(European Plate)	8 mm (5/16")

### » SINGLE BOLT HOLE

Suffix	Centre Hole	Suffix	Centre Hole
1	10.5mm	2	12.5mm



 Diameter×Width	 Load	 Material	 Item No.			 Bearing	 Overall Height	 Swivel radius
			Fixed	Swivel	Brake			
100mmx32mm (4"x1-1/4")	120kgs (265lbs)	PU on PP Core	1150-04-31-1	1150-04-31-2	1150-04-31-4	Ball Bearing	128mm (5-1/16")	Swivel 90mm Swivel W/Brake 115mm
	100kgs (220lbs)	TPR on PP Core	1150-04-75-1	1150-04-75-2	1150-04-75-4			
	125kgs (275lbs)	Resolute	1150-04-68-1	1150-04-68-2	1150-04-68-4			
	80kgs (176lbs)	E-Conductive	1150-04-17-1	1150-04-17-2	1150-04-17-4			
	180kgs (400lbs)	WHDR	1150-04-66-1	1150-04-66-2	1150-04-66-4			
	135kgs (300lbs)	W Resolute	1150-04-48-1	1150-04-48-2	1150-04-48-4			
	100kgs (220lbs)	WPPR	1150-04-47-1	1150-04-47-2	1150-04-47-4			
	130kgs (285lbs)	WPP輪 WPP	1150-04-46-1	1150-04-46-2	1150-04-46-4			
	180kgs (396lbs)	WMRC	1150-04-45-1	1150-04-45-2	1150-04-45-4			
	230kgs (506lbs)	QPU on AL Core	1150-04-87-1	1150-04-87-2	1150-04-87-4			
135kgs (300lbs)	Hi-temp	1150-04-25-1	1150-04-25-2	1150-04-25-4				
100mmx36mm (4"x1-1/2")	160kgs (352lbs)	CPD	1150-04-71-1	1150-04-71-2	1150-04-71-4	Ball Bearing	128mm (5-1/16")	Swivel 90mm Swivel W/Brake 115mm
	160kgs (352lbs)	Blue Resilient Rubber Wheel	1150-04-50-1	1150-04-50-2	1150-04-50-4			
	140kgs (308lbs)	TPR on PP Core	1150-04-77-1	1150-04-77-2	1150-04-77-4			
	160kgs (352lbs)	Resolute	1150-04-76-1	1150-04-76-2	1150-04-76-4			
	250kgs (550lbs)	QPU on AL Core	1150-04-87-1	1150-04-87-2	1150-04-87-4			
	200kgs (440lbs)	Sandwich Wheel	1150-04-40-1	1150-04-40-2	1150-04-40-4			
100mm x 40 mm (4" x 1-3/5")	250kgs (550lbs)	QPU on AL Core	1150-04-87-1	1150-04-87-2	1150-04-87-4	Ball Bearing	128mm (5-1/16")	Swivel 90mm Swivel W/Brake 115mm
125mmx32mm (5"x1-1/4")	130kgs (285lbs)	PU on PP Core	1150-05-31-1	1150-05-31-2	1150-05-31-4	Ball Bearing	155mm (6-1/8")	Swivel 102.5mm Swivel W/Brake 115mm
	110kgs (240lbs)	TPR on PP Core	1150-05-75-1	1150-05-75-2	1150-05-75-4			
	147kgs (325lbs)	Resolute	1150-05-68-1	1150-05-68-2	1150-05-68-4			
	90kgs (198lbs)	E-Conductive	1150-05-17-1	1150-05-17-2	1150-05-17-4			
	200kgs (440lbs)	WHDR	1150-05-66-1	1150-05-66-2	1150-05-66-4			
	147kgs (325lbs)	W Resolute	1150-05-48-1	1150-05-48-2	1150-05-48-4			
	110kgs (240lbs)	WPPR	1150-05-47-1	1150-05-47-2	1150-05-47-4			
	150kgs (330lbs)	WPP	1150-05-46-1	1150-05-46-2	1150-05-46-4			
	200kgs (440lbs)	WMRC	1150-05-45-1	1150-05-45-2	1150-05-45-4			
	250kgs (550lbs)	QPU on AL Core	1150-05-87-1	1150-05-87-2	1150-05-87-4			
125mmx36mm (5"x1-1/2")	200kgs (440lbs)	CPD	1150-05-71-1	1150-05-71-2	1150-05-71-4	Ball Bearing	155mm (6-1/8")	Swivel 102.5mm Swivel W/Brake 115mm
	250kgs (550lbs)	Blue Resilient Rubber Wheel	1150-05-50-1	1150-05-50-2	1150-05-50-4			
	160kgs (352lbs)	TPR on PP Core	1150-05-77-1	1150-05-77-2	1150-05-77-4			
	180kgs (400lbs)	Resolute	1150-05-76-1	1150-05-76-2	1150-05-76-4			
	250kgs (550lbs)	Sandwich Wheel	1150-05-40-1	1150-05-40-2	1150-05-40-4			
125mm x 40 mm (5" x 1-3/5")	250kgs (550lbs)	QPU on AL Core	1150-05-87-1	1150-05-87-2	1150-05-87-4	Ball Bearing	155mm (6-1/8")	Swivel 102.5mm Swivel W/Brake 115mm