




1145 Series

抗衝擊彈簧輪系列

Kingpinless Spring-loaded Caster

- 屬得勝專利產品，避震，超重負載且高抗衝擊，在搬運過程可避免腳架變形扭曲，多款供選擇。採用超厚板材及高級彈簧，品質、工藝明顯優於市場上同類產品。
- DERSHENG'S patented products, shock-absorbing, heavy duty Kingpinless casters with hardened raceways for greater impact resistance to avoid distortions under heavy load. Made of super thick steel and high quality spring, outperforming most products from competitors.


載重 Load
200-550 kg

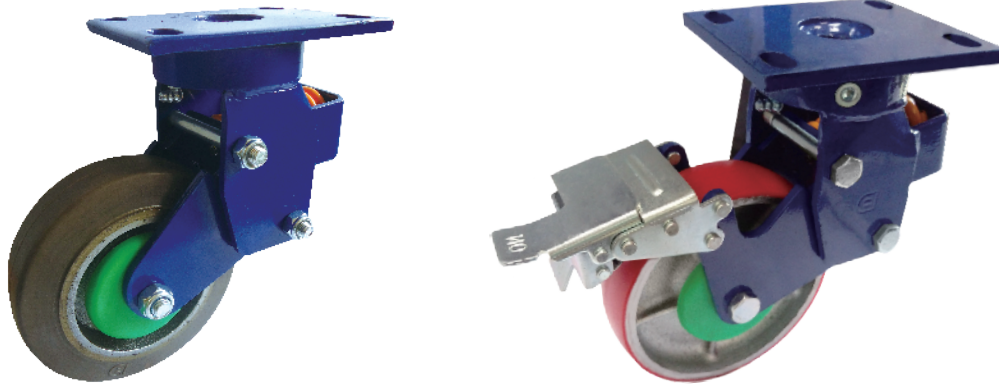

▶▶ 特色區 Features



無鉚釘設計
Kingpinless



AK煞
Swivel W/Center Lock(AK type)
&輪子可附塑膠防塵蓋(供選擇)
Plastic Thread Guard(optional)



PU輪面可以變化硬度
Different PU
tread hardness available



滾珠軸承
Ball Bearing

▶▶ 輪子選項 Wheel Options



鐵芯聚氨酯
PU on Cast



QPU輪
QPU



鋁芯AQPU
QPU on AL Core



環保牽引NBR
Non - marking NBR Rubber
on Cast



鐵芯NBR橡膠輪(叉車料)
NBR Rubber on Cast



EPU輪
EPU



EQPU輪
EQPU



VPU輪
VPU



VQPU輪
VQPU



尼龍輪
Nylon



WMRC輪
WMRC



» 底板規格 TOP PLATE SIZE AND BOLT HOLE SPACING

腳輪尺寸 Caster Size	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安裝尼帽尺寸 Attaching Bolt Size
1	110 x 140mm (4-11/32" x 5-1/2")	75 x 110mm(常規標準底板) (2-15/16" x 4-11/32")	12 mm (1/2")
	110 x 140mm (4-11/32" x 5-1/2")	80 x 105mm(歐規孔距) (3-5/32" x 4-1/8"(European Plate))	12 mm (1/2")
	130 x 165mm (5-1/8" x 6-1/2")	100 x 130mm (3-15/16" x 5-1/8")	12 mm (1/2")
	114 x 159mm (4-1/2" x 6-1/4")	73.8 x 129.4mm (2-29/32" x 5-3/32")	12 mm (1/2")

輪徑*輪寬 Diameter*Width	載重 Load	材質 Material	型號 Item No.			軸承 Bearing	總高 Overall Height	迴旋半徑 Swivel radius
			固定 Fixed	活動 Swivel	剎車 Brake			
125mm x 40mm (5" x 1-9/16")	200 kgs (440 lbs)	尼龍輪 Nylon	1145-05-07-1	1145-05-07-2	1145-05-07-4	滾珠 Ball Bearing	210mm (8-9/32")	活動 132mm AK煞 194mm Swivel 132mm Swivel W/AK lock brake 194mm
	200 kgs (440 lbs)	環保牽引NBR輪 Non-marking NBR Rubber on Cast	1145-05-90-1	1145-05-90-2	1145-05-90-4			
	250 kgs (550 lbs)	鋁芯AQP QPU on AL Core	1145-05-87-1	1145-05-87-2	1145-05-87-4			
	200 kgs (440 lbs)	鐵芯聚氨酯 PU on Cast	1145-05-33-1	1145-05-33-2	1145-05-33-4			
	200 kgs (440 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-05-04-1	1145-05-04-2	1145-05-04-4			
	250 kgs (550 lbs)	QPU輪 QPU	1145-05-80-1	1145-05-80-2	1145-05-80-4			
	250 kgs (550 lbs)	EPU輪 EPU	1145-05-78-1	1145-05-78-2	1145-05-78-4			
	350 kgs (770 lbs)	EQPU輪 EQPU	1145-05-81-1	1145-05-81-2	1145-05-81-4			
150mm x 40mm (6" x 1-9/16")	250 kgs (550 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-06-04-1	1145-06-04-2	1145-06-04-4	滾珠 Ball Bearing	225mm (8-27/32")	活動 146mm AK煞 200mm Swivel 146mm Swivel W/AK lock brake 200mm
	250 kgs (550 lbs)	尼龍輪 Nylon	1145-06-07-1	1145-06-07-2	1145-06-07-4			
	250 kgs (550 lbs)	環保牽引NBR輪 Non-marking NBR Rubber on Cast	1145-06-90-1	1145-06-90-2	1145-06-90-4			
	250 kgs (550 lbs)	WMRC輪 WMRC	1145-06-45-1	1145-06-45-2	1145-06-45-4			
150mm x 42mm (6" x 1-5/8")	250 kgs (550 lbs)	鐵芯聚氨酯 PU on Cast	1145-06-33-1	1145-06-33-2	1145-06-33-4	滾珠 Ball Bearing	225mm (8-27/32")	活動 146mm AK煞 200mm Swivel 146mm Swivel W/AK lock brake 200mm
	300 kgs (660 lbs)	鋁芯AQP QPU on AL Core	1145-06-87-1	1145-06-87-2	1145-06-87-4			
	300 kgs (660 lbs)	QPU輪 QPU	1145-06-80-1	1145-06-80-2	1145-06-80-4			
	300 kgs (660 lbs)	EPU輪 EPU	1145-06-78-1	1145-06-78-2	1145-06-78-4			
	400 kgs (880 lbs)	EQPU輪 EQPU	1145-06-81-1	1145-06-81-2	1145-06-81-4			
	400 kgs (880 lbs)	VPU輪 VPU	1145-06-82-1	1145-06-82-2	1145-06-82-4			
	500 kgs (1100 lbs)	VQPU輪 VQPU	1145-06-83-1	1145-06-83-2	1145-06-83-4			
150mm x 46mm (6" x 1-13/16")	300 kgs (660 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-06-04-1	1145-06-04-2	1145-06-04-4	滾珠 Ball Bearing	280mm (11-1/32")	活動 182mm AK煞 254mm Swivel 182mm Swivel W/AK lock brake 254mm
200mm x 44mm (8" x 1-3/4")	300 kgs (660 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-08-04-1	1145-08-04-2	1145-08-04-4			
200mm x 50mm (8" x 2")	300 kgs (660 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-08-04-1	1145-08-04-2	1145-08-04-4	滾珠 Ball Bearing	280mm (11-1/32")	活動 182mm AK煞 254mm Swivel 182mm Swivel W/AK lock brake 254mm
	300 kgs (660 lbs)	環保牽引NBR輪 Non-marking NBR Rubber on Cast	1145-08-90-1	1145-08-90-2	1145-08-90-4			
	300 kgs (660 lbs)	鐵芯聚氨酯 PU on Cast	1145-08-33-1	1145-08-33-2	1145-08-33-4			
	350 kgs (770 lbs)	QPU輪 QPU	1145-08-80-1	1145-08-80-2	1145-08-80-4			
	350 kgs (770 lbs)	EPU輪 EPU	1145-08-78-1	1145-08-78-2	1145-08-78-4			
	450 kgs (990 lbs)	EQPU輪 EQPU	1145-08-81-1	1145-08-81-2	1145-08-81-4			
	450 kgs (990 lbs)	VPU輪 VPU	1145-08-82-1	1145-08-82-2	1145-08-82-4			
	550 kgs (1210 lbs)	VQPU輪 VQPU	1145-08-83-1	1145-08-83-2	1145-08-83-4			
	300 kgs (660 lbs)	尼龍輪 Nylon	1145-08-07-1	1145-08-07-2	1145-08-07-4			
300 kgs (660 lbs)	WMRC輪 WMRC	1145-08-45-1	1145-08-45-2	1145-08-45-4				
350 kgs (770 lbs)	鋁芯AQP QPU on AL Core	1145-08-87-1	1145-08-87-2	1145-08-87-4				