




1148 Series

48 中控雙球輪系列

48 Series Central Locking Caster (All Plastic)

- 轉動靈活、承載重量高、外型美觀，低重心，行走穩定順暢。使用精密滾珠軸承。輪面有兩種選擇：PPR輪和全效輪。可提供無磁腳輪。另有提供活動，詳情請於我們聯絡。
- Frame made from high grade synthetic material, low height, two precision ball bearings in swivel head. Wheels embedded with precision ball bearings. Wheel tread with two options, TPR on PP core and Resolute rubber on PP core. Swivel without central lock model is available, please consult factory. Magnetic Free Caster also available.

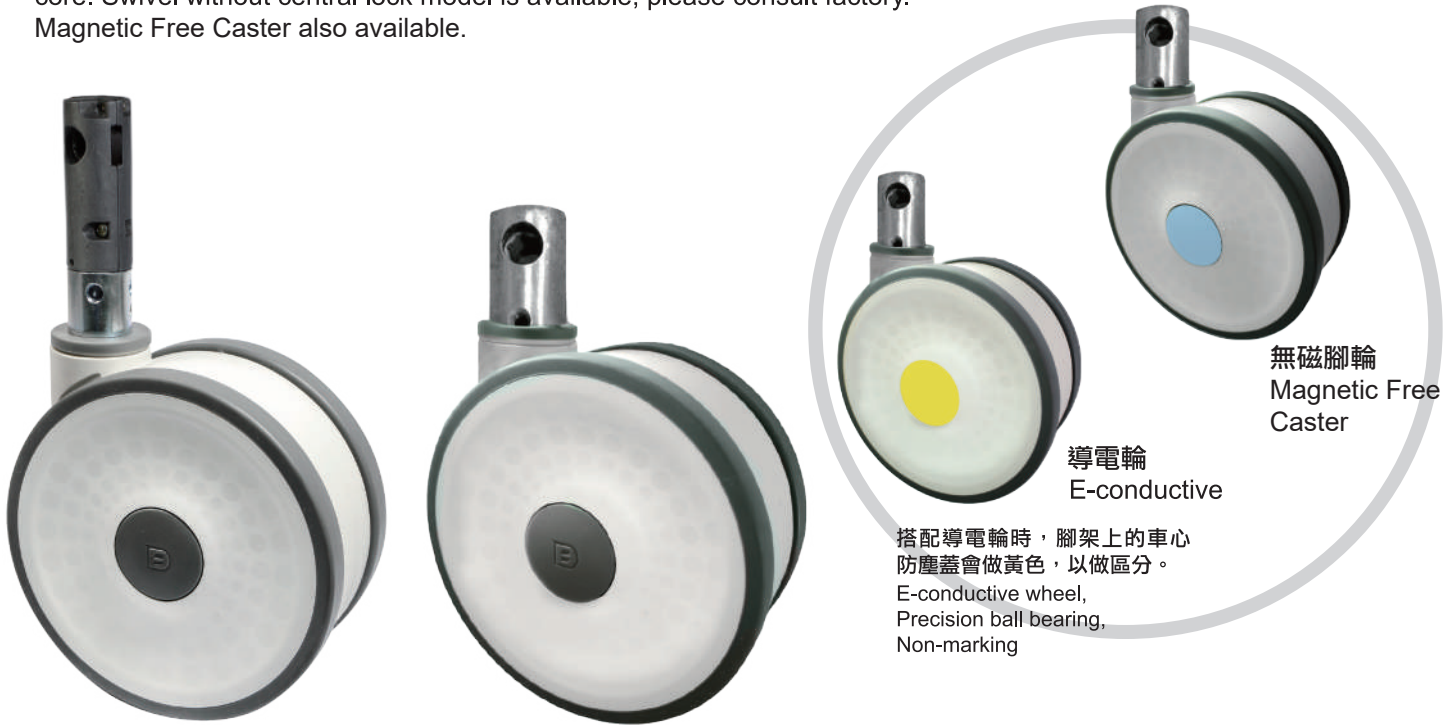

導電輪
E-conductive

無磁腳輪
Magnetic Free
Caster

搭配導電輪時，腳架上的車心防塵蓋會做黃色，以做區分。
E-conductive wheel,
Precision ball bearing,
Non-marking

Brake type	Wheel diameter (mm)	Width of Tread (mm)	Stem diameter (mm)	Stem length (mm)	Offset (mm)	Overall height (mm)	Load capacity (kg)	Swivel radius (mm)	Hole height (mm)	Hole diameter (mm)	Angle	Wheel Tread Material	ITEM NO.	
剎車型式	輪徑	輪寬	插桿直徑	插桿長度	偏心距	總高	載重	旋轉半徑	插桿六角孔中心高	插桿六角孔對邊	六角轉件角度	輪面材質	品號	
Swivel caster with total lock 二段	125	15	28	96	40	130	125	102.5	78.5	11	A	TPR on PP Core 超級人造膠	11480500268010	
											B		11480500268020	
	125	15	32	50	40	130	125	102.5	34	11	A	TPR on PP Core 超級人造膠	11480500268030	
											B		11480500268040	
	150	15	28	96	47.5	155	125	122.5	78.5	11	A	TPR on PP Core 超級人造膠	11480600268010	
											B		11480600268020	
	150	15	32	50	47.5	155	125	122.5	34	11	A	TPR on PP Core 超級人造膠	11480600268030	
											B		11480600268040	
	Swivel caster with total lock 二段	125	15	28	96	40	130	150	102.5	78.5	11	A	Resolute Rubber 全效輪	11480500458060
												B		11480500458020
		125	15	32	50	40	130	150	102.5	34	11	A	Resolute Rubber 全效輪	11480500458070
												B		11480500458040
		150	15	28	96	47.5	155	150	122.5	78.5	11	A	Resolute Rubber 全效輪	11480600458090
												B		11480600458020
		150	15	32	50	47.5	155	150	122.5	34	11	A	Resolute Rubber 全效輪	11480600458100
												B		11480600458040



Brake type	Wheel diameter (mm)	Width of Tread (mm)	Stem diameter (mm)	Stem length (mm)	Offset (mm)	Overall height (mm)	Load capacity (kg)	Swivel radius (mm)	Hole height (mm)	Hole diameter (mm)	Angle	Wheel Tread Material	ITEM NO.	
剎車型式	輪徑	輪寬	插桿直徑	插桿長度	偏心距	總高	載重	旋轉半徑	插桿六角孔中心高	插桿六角孔對邊	六角轉件角度	輪面材質	品號	
Swivel caster with total and directional lock 三段	125	15	28	96	40	130	125	102.5	78.5	11	A	TPR on PP Core 超級人造膠	11480500268050	
											B		11480500268060	
	125	15	32	50	40	130	125	102.5	34	11	A		11480500268070	
											B		11480500268080	
	150	15	28	96	47.5	155	125	122.5	78.5	11	A		11480600268050	
											B		11480600268060	
	150	15	32	50	47.5	155	125	122.5	34	11	A		11480600268070	
											B		11480600268080	
	125	15	28	96	40	130	150	102.5	78.5	11	A		Resolute Rubber 全效輪	11480500458080
											B			11480500458010
	125	15	32	50	40	130	150	102.5	34	11	A			11480500458090
											B			11480500458030
	150	15	28	96	47.5	155	150	122.5	78.5	11	A			11480600458050
											B			11480600458010
	150	15	32	50	47.5	155	150	122.5	34	11	A			11480600458060
											B			11480600458030

