

VPU系列

超高負載重型輪

PU外包+鐵芯/鑄鐵芯

輪面硬度		92° shore A
溫度範圍		-30°C to +70°C
滾動順暢		優秀
音量		良好
保護地板		良好



輪面


由高品質聚氨酯製成。得勝硬度92°的PU輪不僅提供良好的地板保護作用，而且低噪音。得勝PU輪有著優秀的抗水解特性，適用熱帶地區及潮濕的工作環境。

輪框

內框：鐵芯/鑄鐵芯

特色

- 抗化學、溶劑及侵蝕
- 耐磨
- 抗微生物
- 適用環境溫度：-30°C ~ +70°C
- 在正常使用情況下，無需維修

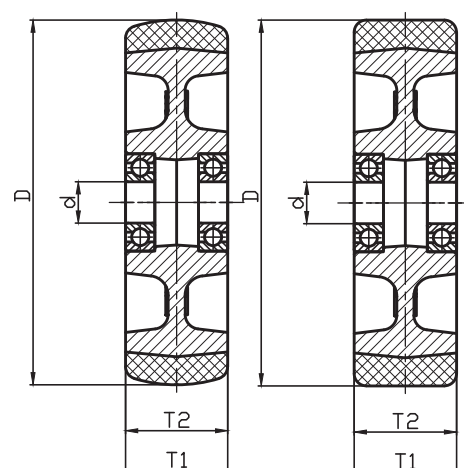

品號	輪徑 (D)【mm】	輪寬 (T2)【mm】	載重 【kg(lbs)】	軸承內徑 Ø(d)【mm】	中寬 (T1)【mm】	輪面	軸承
12035106186171	150	42	700 kgs (1543lbs)	17	42	圓 弧	精密滾珠 軸承
12035106186271	150	42	700 kgs (1543lbs)	20	42		
12035106306171	150	75	1100 kgs (2425lbs)	20	75		
12035106306271	150	75	1100 kgs (2425lbs)	25	75		
12035107206171	180	50	850 kgs (1874lbs)	20	50		
12035107206271	180	50	850 kgs (1874lbs)	25	50		
12035108206171	200	50	1000 kgs (2205lbs)	20	50		
12035108206271	200	50	1000 kgs (2205lbs)	25	50		
12036908206471	200	50	1000 kgs (2205lbs)	30	50		
12036908206571	200	50	1000 kgs (2205lbs)	35	50		
12036908206671	200	50	1000 kgs (2205lbs)	40	50		
12035110256171	250	62	1500 kgs (3307lbs)	20	61		
12035110256271	250	62	1500 kgs (3307lbs)	25	61		
12035110256371	250	62	1500 kgs (3307lbs)	30	61		
12034110256471	250	62	1500 kgs (3307lbs)	35	61		
12035112356171	300	90	1800 kgs (3968lbs)	30	90		
12035112356271	300	90	1800 kgs (3968lbs)	35	90		
12035114356201	350	90	2200 kgs (4850lbs)	35	90		
12035114356101	350	90	2200 kgs (4850lbs)	40	90		
12035114356301	350	90	2200 kgs (4850lbs)	45	90		
12035114356401	350	90	2200 kgs (4850lbs)	50	90		
12035110306171	250	80	2000 kgs (4409lbs)	25	90	平 面	
12035110306271	250	80	2000 kgs (4409lbs)	30	90		
12035110306371	250	80	2000 kgs (4409lbs)	35	90		
12035112356371	300	90	2400 kgs (5291lbs)	30	90		
12035112356471	300	90	2400 kgs (5291lbs)	35	90		
12035116406171	400	100	2800 kgs (6190lbs)	35	100		
12035116406271	400	100	2800 kgs (6190lbs)	40	100		
12035116406371	400	100	2800 kgs (6190lbs)	45	100		
12035116406471	400	100	2800 kgs (6190lbs)	50	100		