





1168Series

68系列支撑升降轮

Levelling Caster

- 68系列是一款便捷支撑平衡调节架脚轮，踩踏脚踏板便可使轮子上下移动。在固定设备时，脚轮收起，脚杯着地时，可精密调整水平，平稳支撑；在移动设备时，脚轮下降，脚杯离地，可随意移动设备。另有无升降功能之支撑脚轮可供选择。
- This levelling caster allows customers to move the wheel up and down by activating or deactivating the brake lever. When the lever engaged, the wheel moves down to turn into a swivel caster, allowing the equipment carried to be moved freely. When de-activated, the wheel moves up and turns into a levelling mechanism with secure foot to support the equipment. With the caster foot firmly standing on the ground, customers can adjust the height of the foot to reach the horizontal balance needed for the equipment. Levelling caster without brake level is also available.

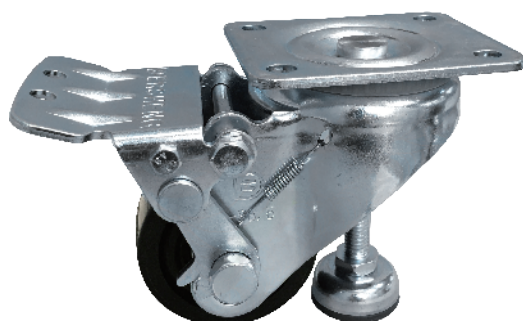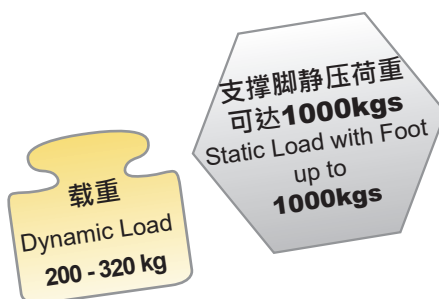

» 特色区 Features

» 轮子选项 Wheel Options



导电橡胶垫
E-Conductive Rubber



尼龙轮 (45宽)
Nylon



金刚轮
King Kong Wheel



尼龙轮
Nylon



滚珠轴承
Ball Bearing



ZQPU轮
QPU(Dual Wheels)



QPU轮
QPU



铝芯AQP
QPU on AL Core

» 底板规格 TOP PLATE SIZE AND BOLT HOLE SPACING

编号 Suffix	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安装尼帽尺寸 Attaching Bolt Size
* 1	85 x 105 mm (3-5/16" x 4-1/8")	60 x 80 mm (欧规底板) 2-3/8"x3-1/8"(European Plate)	8 mm (5/16")
2	100 x 115 mm (4"x 4-1/2")	70 x 85 mm (D型底板) (2-5/8"~3"x3"~3-5/8")	10 mm (3/8")


* 2.5"无支撑脚轮只搭配欧规底板。
2.5" caster only fit with European Plate.




支撑升降脚轮规格 Caster With Foot & Brake Level

轮子尺寸 Size	材质 Material	轮径 Wheel Diameter (mm) D	轮宽 Wheel Width (mm)	载重 Dynamic Load	支撑脚 静压 荷重 Static Load with Foot	轴承 Bearing	总高 Overall Height (mm) H	最大总高 Max. Overall Height (mm) h	上升距离 Lifting Distance (mm) T	最大离地间距 Max Foot Floor Clearance (mm) t	偏心距 Offset (mm)	回旋半径 Swivel Radius (mm) R	型号 Item Number
2.5"	尼龙轮 Nylon	64	45	200kgs (440lbs)	1000kgs (2200lbs)	滚珠 Ball Bearing	96	108	6	6	56	短踏板 135mm 长踏板 147mm Short pedal 135mm Long pedal 147mm	1168-25-07-10
	金刚轮 King Kong Wheel	62.5	45	200kgs (440lbs)			95	107	7	5	56		1168-25-100-10
	QPU轮 QPU	62.5	45	200kgs (440lbs)									1168-25-80-10
	ZQPU轮 ZQPU(Dual Wheels)	62.5	20x2	200kgs (440lbs)									1168-25-101-10
3"	尼龙轮 Nylon	75	45	260kgs (570lbs)	1000kgs (2200lbs)	滚珠 Ball Bearing	114	126	6	6	56	短踏板 135mm 长踏板 147mm Short pedal 135mm Long pedal 147mm	1168-03-07-10
	金刚轮 King Kong Wheel	75	45	260kgs (570lbs)									1168-03-100-10
	QPU轮 QPU	75	45	260kgs (570lbs)									1168-03-80-10
	ZQPU轮 ZQPU(Dual Wheels)	75	20x2	260kgs (570lbs)									1168-03-101-10
4"	尼龙轮 Nylon	100	32	320kgs (700lbs)	1000kgs (2200lbs)	滚珠 Ball Bearing	136.5	148.5	6	6	65	短踏板 142mm 长踏板 157mm Short pedal 142mm Long pedal 157mm	1168-04-07-10
	尼龙轮 Nylon	100	36	250kgs (550lbs)									1168-04-07-10
	AQPU轮 QPU on AL Core	100	40	320kgs (700lbs)									1168-04-87-10
	ZQPU轮 ZQPU(Dual Wheels)	100	22x2	320kgs (700lbs)									1168-04-101-10

支撑脚静压荷重 Static Load with Foot

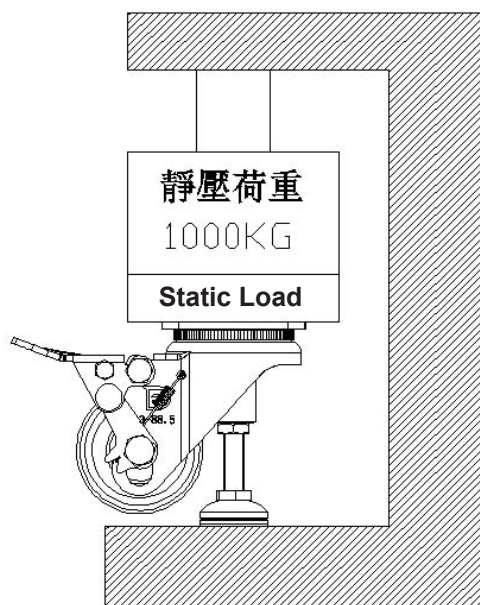


支撑升降脚轮 Levelling Caster

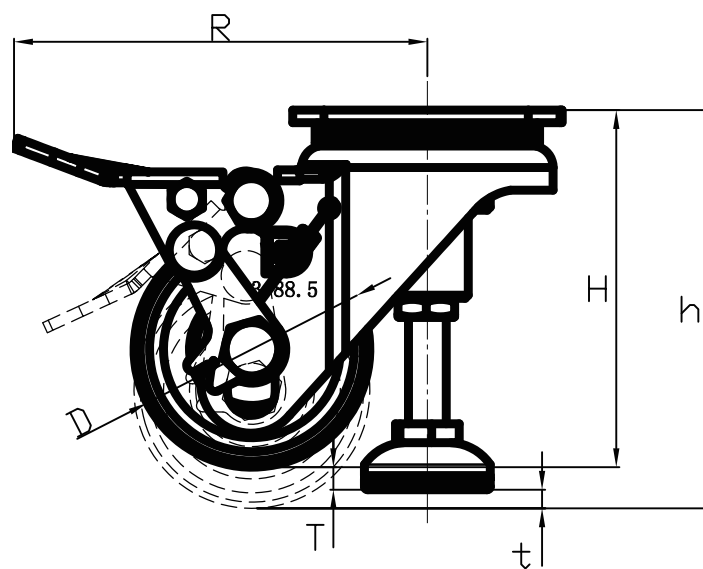



支撑活动脚轮规格 Caster With Foot

轮子尺寸 Size	材质 Material	轮径 Wheel Diameter (mm)	轮宽 Wheel Width (mm)	载重 Load	支撑脚 静压 承重 Static Load with Foot	型号 Item No.	轴承 Bearing	总高 Overall Height	偏心距 Offset	回旋半径 Swivel Radius
						活动支撑 Swivel				
2.5"	尼龙轮 Nylon	75	45	200kgs(440lbs)	1000kgs (2200lbs)	1168-25-07-2(1)	滚珠轴承 Ball Bearing	102mm	64mm	97mm
	金刚轮 King Kong Wheel	75	45	200kgs(440lbs)		1168-25-100-2(1)				
	QPU轮 QPU	75	45	200kgs(440lbs)		1168-25-80-2(1)				
	ZQPU轮 ZQPU(Dual Wheels)	75	20x2	200kgs(440lbs)		1168-25-101-2(1)				
3"	尼龙轮 Nylon	75	45	220kgs(485lbs)	1000kgs (2200lbs)	1168-03-07-2(1)	滚珠轴承 Ball Bearing	120mm	69mm	107mm
	金刚轮 King Kong Wheel	75	45	220kgs(485lbs)		1168-03-100-2(1)				
	QPU轮 QPU	75	45	220kgs(485lbs)		1168-03-80-2(1)				
	ZQPU轮 ZQPU(Dual Wheels)	75	20x2	220kgs(485lbs)		1168-03-101-2(1)				
4"	尼龙轮 Nylon	100	32	250kgs(550lbs)	1000kgs (2200lbs)	1168-04-07-2(1)	滚珠轴承 Ball Bearing	142.5mm	77mm	127mm
	尼龙轮 Nylon	100	36	250kgs(550lbs)		1168-04-07-2(1)				
	AQPU轮 QPU on AL Core	100	40	250kgs(550lbs)		1168-04-87-2(1)				
	ZQPU轮 ZQPU(Dual Wheels)	100	22x2	250kgs(550lbs)		1168-04-101-2(1)				



无支撑脚轮规格 Swivel Caster Without Foot

轮子尺寸 Size	材质 Material	轮径 Wheel Diameter (mm)	轮宽 Wheel Width (mm)	载重 Load	型号 Item No.		轴承 Bearing	总高 Overall Height	偏心距 Offset	回旋半径 Swivel Radius
					固定 Fixed	活动 Swivel				
* 2.5"	尼龙轮 Nylon	75	45	260kgs(570lbs)	1168-25-07-1	1168-25-07-2	滚珠轴承 Ball Bearing	102mm	31mm	68.5mm
	金刚轮 King Kong Wheel	75	45	260kgs(570lbs)	1168-25-100-1	1168-25-100-2				
	QPU轮 QPU	75	45	260kgs(570lbs)	1168-25-80-1	1168-25-80-2				
	ZQPU轮 ZQPU(Dual Wheels)	75	20x2	260kgs(570lbs)	1168-25-101-1	1168-25-101-2				
3"	尼龙轮 Nylon	75	45	260kgs(570lbs)	1168-03-07-1	1168-03-07-2	滚珠轴承 Ball Bearing	120mm	40mm	77.5mm
	金刚轮 King Kong Wheel	75	45	260kgs(570lbs)	1168-03-100-1	1168-03-100-2				
	QPU轮 QPU	75	45	260kgs(570lbs)	1168-03-80-1	1168-03-80-2				
	ZQPU轮 ZQPU(Dual Wheels)	75	20x2	260kgs(570lbs)	1168-03-101-1	1168-03-101-2				
4"	尼龙轮 Nylon	100	32	320kgs(700lbs)	1168-04-07-1	1168-04-07-2	滚珠轴承 Ball Bearing	142.5mm	40mm	90mm
	尼龙轮 Nylon	100	36	250kgs(550lbs)	1168-04-07-1	1168-04-07-2				
	AQPU轮 QPU on AL Core	100	40	320kgs(700lbs)	1168-04-87-1	1168-04-87-2				
	ZQPU轮 ZQPU(Dual Wheels)	100	22x2	320kgs(700lbs)	1168-04-101-1	1168-04-101-2				

* 2.5"无支撑脚轮只搭配欧规底板。 2.5" caster only fit with European Plate.