

红火轮系列— H150

耐高温橡胶轮-150°C/302°F

耐高温橡胶外包+铝芯

	轮面硬度		85° ± 5° shore A
	温度范围		-25°C to +80°C
	滚动顺畅		良好
	音量		优秀
	保护地板		优秀



轮面


由高质量的耐高温橡胶轮制成，得胜铝芯耐高温橡胶轮轮面硬度是 85° ± 5°，具有极佳的操作舒适性，优秀的地板保护作用及避震功能。颜色：红色

轮框

内框：铝芯

特色

- 抗化学、溶剂及侵蚀
- 适用环境温度：-25°C/-13°F ~ 80°C/180°F，且短暂时间内可在150°C/302°F环境下。
- 在正常使用情况下，无需维修

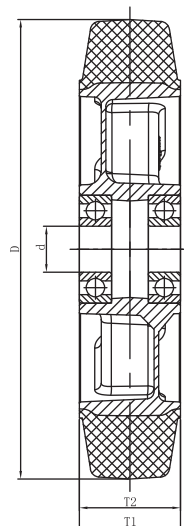

品号	轮径 (D) [mm]	轮宽 (T2) [mm]	载重 [kg(lbs)]	轴承内径 Ø(d) [mm]	中宽 (T1) [mm]	轴承
12048204135171	100	31	70kgs (154lbs)	15	32	精密滚珠 轴承
12048205135171	125	31	90kgs (198lbs)	15	32	

