






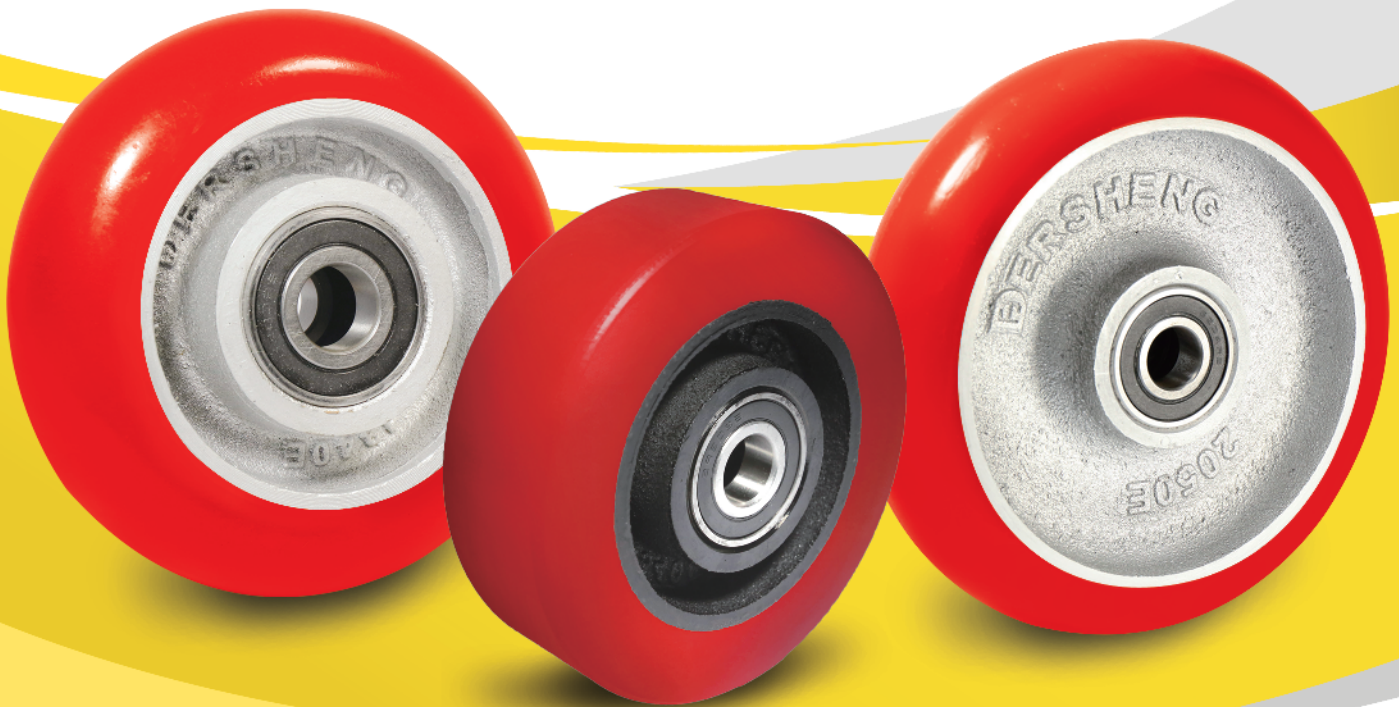


EPU Series

HEAVY DUTY WHEEL(THICK TREAD)

with Qualthane Donut/Flat shape
Polyurethane tread,
with steel/cast iron core

	Tread & tyre hardness	92° shore A
	Temperature resistance	-30°C to +70°C
	Rolling resistance	very good
	Operating noise	good
	Floor surface preservation	good



Tread

Made of high quality polyurethane. Dersheng's 92° shore A polyurethane wheels offer good floor preservation and low noise operation. With its hydrolysis resistance characteristic, Dersheng PU wheel is perfect wheel for tropical area or working environment associated with high humidity.

Wheel centre/rim

Made of rugged casting iron/steel.

Other features

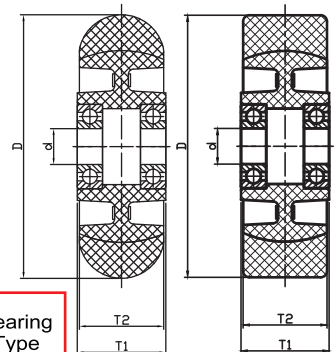
Good resistant to chemical, solvent and many other aggressive substances.









Great abrasion resistance.

Good resistance to micro-organisms.

Working temperature: -30°C to +70°C.

Maintenance-free under normal conditions.



 Item No	 Wheel Diameter (D) [mm]	 Wheel Width (T2) [mm]	 Load Capacity [kg(lbs)]	 Axle Bore Ø(d) [mm]	 Hub Length (T1) [mm]	 Tread Profile	 Bearing Type
12035205156171	125	40	550 kgs (1213lbs)	17	42	Donut	Ball bearing
12035205206180	125	50	600 kgs (1323lbs)	13	62		
12035206186171	150	42	650 kgs (1433lbs)	17	42		
12035206206180	150	50	700 kgs (1543lbs)	13	62		
12035208206180	200	50	800 kgs (1764lbs)	13	62		
12035208206171	200	50	800 kgs (1764lbs)	20	50		
12035208206271	200	50	800 kgs (1764lbs)	25	50		
12035205156271	125	40	600 kgs (1323lbs)	17	42	Flat	
12035206186271	150	42	700 kgs (1543lbs)	17	42		
12035208206371	200	50	850 kgs (1874lbs)	20	50		
12035208206471	200	50	850 kgs (1874lbs)	25	50		