




1157 Series 重型

紅架系列 57 Series Caster

- 熱處理圓盤大幅提升耐用度與產品荷重且轉動靈活，適用於汽車廠、汽車裝配廠、玻璃廠、紡織廠等負載重的車間，另可附防纏絲蓋及防塵蓋，屬得駐專利產品，可以有效防止腳輪因灰塵或纏絲而無法轉動，提高腳輪使用壽命。
- Swivel easily under heavy load with heat-treated swivel head; ideal for heavy-duty workshop trucks in automobile, glass, textile industries, etc. Patented thread guards and dust covers prevent swivel failure caused by build-up of strings between the wheel and fork legs, as well as the dust in the wheel bearing.

載重 Load
200-750 kg

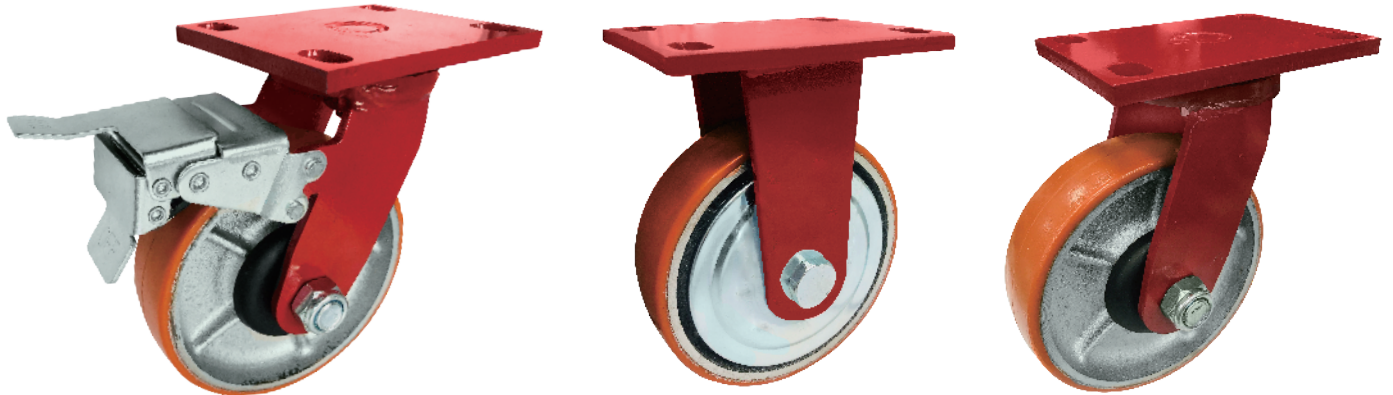


特色區 Features



輪子可附防纏絲蓋(供選擇)
Thread guard specially
for textile industry(optional)



輪子可附金屬防塵蓋(供選擇)
Metal Thread Guard(optional)



AK熱
Swivel W/Center lock(AK type)
另輪子可附塑膠防塵蓋(供選擇)
Plastic Thread Guard(optional)



PU輪面可以變化硬度
Different PU
tread hardness available

輪子選項 Wheel Options

鐵芯聚氨酯
PU on Cast



APU輪
PU on AL Core



VPU輪
VPU

三星輪
Rubber on Cast



CPD輪
CPD



EPU輪
EPU

鐵芯NBR橡膠輪
NBR Rubber on Cast



銑輪
Cast Iron




VQPU輪
VQPU

尼龍輪
Nylon



環保NBR橡膠輪
Non-marking Rubber on Cast



鐵芯VXPU
XPU on Iron Core

WMRC輪
WMRC



EQPU輪
EQPU



鋁芯QQ橡膠輪
Recilcent rubber on AL Core

QPU輪
QPU



鐵芯聚氨酯(2050A/2050B)
PU on Cast (2050A/2050B)



環保牽引NBR
Non-marking NBR
Rubber on Cast



滾珠軸承
Ball Bearing



ZQPU輪(雙輪)
ZQPU (Dual Wheels)



鋁芯ALQPU
QPU on AL Core









» 底板規格 TOP PLATE SIZE AND BOLT HOLE SPACING







腳輪尺寸 Caster Size	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安裝尼帽尺寸 Attaching Bolt Size
4"	90 x 120 mm (3-17/32" x 4-23/32")	60 x 90 mm (2-3/8" x 3-17/32")	11 mm (7/16")
	100 x 115 mm (4" x 4-1/2")	75 x 80 mm (D型底板) (2-5/8"~3" x 3~3-5/8")	9.5 mm (3/8")
5,6,8"	110 x 140 mm (4-11/32" x 5-1/2")	75 x 110 mm (常規標準底板) (2-15/16" x 4-11/32")	12 mm (1/2")
	100 x 115 mm (4" x 4-1/2")	75 x 80 mm (D型底板) (2-5/8"~3" x 3~3-5/8")	9.5 mm (3/8")

輪徑×輪寬 Diameter x Width	載重 Load	材質 Material	型號			軸承 Bearing	總高 Overall Height	迴旋半徑 Swivel radius
			固定	活動	煞車			
100mm x 32mm (4"x1-1/4")	250 kgs (550 lbs)	尼龍輪 Nylon	1157-04-07-1	1157-04-07-2	1157-04-07-4	滾珠軸承 Ball Bearing	147mm (5-25/32")	活動 92 mm Swivel 92mm AK煞 141 mm Swivel W/AK Lock Brake 141mm
	200 kgs (440 lbs)	CPD輪 CPD	1157-04-49-1	1157-04-49-2	1157-04-49-4			
100mm x 34mm (4"x1-3/8")	335 kgs (735 lbs)	QPU輪(圓弧) QPU (Round)	1157-04-80-1	1157-04-80-2	1157-04-80-4			
	385 kgs (845 lbs)	QPU輪(平面) QPU (Flat)	1157-04-80-1	1157-04-80-2	1157-04-80-4			
100mm x 36mm (4"x1-7/16")	250 kgs (550 lbs)	鐵芯聚氨酯 PU on Cast	1157-04-33-1	1157-04-33-2	1157-04-33-4			
	200 kgs (440 lbs)	三星輪 Rubber on Cast	1157-04-03-1	1157-04-03-2	1157-04-03-4			
	250 kgs (550 lbs)	APU輪(圓弧) PU on AL Core (Round)	1157-04-108-1	1157-04-108-2	1157-04-108-4			
	300 kgs (660 lbs)	鋁芯AQPU輪(圓弧) QPU on AL Core (Round)	1157-04-87-1	1157-04-87-2	1157-04-87-4			
100mm x 38mm (4"x1-1/2")	200 kgs (440 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1157-04-04-1	1157-04-04-2	1157-04-04-4			
	200 kgs (440 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1157-04-11-1	1157-04-11-2	1157-04-11-4			
	200 kgs (440 lbs)	環保牽引NBR輪 Non-marking NBR Rubber on Cast	1157-04-90-1	1157-04-90-2	1157-04-90-4			
100mm x 40mm (4"x1-9/16")	275 kgs (600 lbs)	APU輪(圓弧) PU on AL Core (Round)	1157-04-108-1	1157-04-108-2	1157-04-108-4			
	200 kgs (440 lbs)	鋁芯QQ橡膠輪 Recilent rubber on AL Core	1157-04-89-1	1157-04-89-2	1157-04-89-4			
	325 kgs (715 lbs)	鋁芯AQPU輪(圓弧) QPU on AL Core (Round)	1157-04-87-1	1157-04-87-2	1157-04-87-4			
100mm x 46.5mm (4"x1-13/16")	335 kgs (735 lbs)	ZQPU輪(雙輪) ZQPU (Dual Wheels)	1157-04-101-1	1157-04-101-2	1157-04-101-4			
122mm x 36.5mm (4-13/16"x1-7/16")	600 kgs (1320 lbs)	鑄輪 Cast Iron	1157-04-14-1	1157-04-14-2	1157-04-14-4			









 輪徑×輪寬 Diameter x Width	 載重 Load	 材質 Material	型號			 軸承 Bearing	 總高 Overall Height	 迴旋半徑 Swivel radius
			固定	活動	煞車			
125mm x 40mm (5" x 1-9/16")	340 kgs (750 lbs)	鐵芯聚氨酯 PU on Cast	1157-05-33-1	1157-05-33-2	1157-05-33-4	滾珠軸承 Ball Bearing	170mm (6-11/16")	活動 107 mm Swivel 107mm AK煞 158 mm Swivel W/AK Lock Brake 158mm
	220 kgs (485 lbs)	三星輪 Rubber on Cast	1157-05-03-1	1157-05-03-2	1157-05-03-4			
	300 kgs (660 lbs)	尼龍輪 Nylon	1157-05-07-1	1157-05-07-2	1157-05-07-4			
	300 kgs (660 lbs)	APU輪(圓弧) PU on AL Core (Round)	1157-05-108-1	1157-05-108-2	1157-05-108-4			
	350 kgs (770 lbs)	鋁芯AQP輪(圓弧) QPU on AL Core (Round)	1157-05-87-1	1157-05-87-2	1157-05-87-4			
	250 kgs (550 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1157-05-04-1	1157-05-04-2	1157-05-04-4			
	250 kgs (550 lbs)	CPD輪 CPD	1157-05-49-1	1157-05-49-2	1157-05-49-4			
	250 kgs (550 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1157-05-11-1	1157-05-11-2	1157-05-11-4			
	250 kgs (550 lbs)	環保牽引NBR輪 Non-marking NBR Rubber on Cast	1157-05-90-1	1157-05-90-2	1157-05-90-4			
	300 kgs (660 lbs)	鋁芯QQ橡膠輪 Recilent rubber on AL Core	1157-05-89-1	1157-05-89-2	1157-05-89-4			
	450 kgs (990 lbs)	QPU輪(圓弧) QPU (Round)	1157-05-80-1	1157-05-80-2	1157-05-80-4			
	500 kgs (1100 lbs)	QPU輪(平面) QPU (Flat)	1157-05-80-1	1157-05-80-2	1157-05-80-4			
	340 kgs (750 lbs)	EPU輪(圓弧) EPU (Round Shape)	1157-05-78-1	1157-05-78-2	1157-05-78-4			
	390 kgs (860 lbs)	EPU輪(平面) EPU (Flat Shape)	1157-05-78-1	1157-05-78-2	1157-05-78-4			
	450 kgs (990 lbs)	EQPU輪(圓弧) EQPU (Round Shape)	1157-05-81-1	1157-05-81-2	1157-05-81-4			
	500 kgs (1100 lbs)	EQPU輪(平面) EQPU (Flat Shape)	1157-05-81-1	1157-05-81-2	1157-05-81-4			
125mm x 50mm (5" x 2")	400 kgs (880 lbs)	APU輪(平面) PU on AL Core (Flat)	1157-05-108-1	1157-05-108-2	1157-05-108-4	滾珠軸承 Ball Bearing	170mm (6-11/16")	活動 107 mm Swivel 107mm AK煞 158 mm Swivel W/AK Lock Brake 158mm
	450 kgs (990 lbs)	鋁芯AQP輪(平面) QPU on AL Core (Flat)	1157-05-87-1	1157-05-87-2	1157-05-87-4			
	420 kgs (920 lbs)	QPU輪(平面) QPU (Flat)	1157-05-80-1	1157-05-80-2	1157-05-80-4			
	500 kgs (1100 lbs)	EQPU輪(圓弧) EQPU (Round)	1157-05-81-1	1157-05-81-2	1157-05-81-4			
	500 kgs (1100 lbs)	EPU輪(圓弧) EPU (Round)	1157-05-78-1	1157-05-78-2	1157-05-78-4			
125mm x 51mm (5" x 2")	450 kgs (990 lbs)	ZQPU輪(雙輪) ZQPU (Dual Wheels)	1157-05-101-1	1157-05-101-2	1157-05-101-4			
138mm x 36.5mm (5-7/16" x 1-7/16")	700 kgs (1540 lbs)	銑輪 Cast Iron	1157-06-14-1	1157-06-14-2	—	滾珠軸承 Ball Bearing	191mm (7-17/32")	活動 111 mm Swivel 111mm
150mm x 40mm (6" x 1-9/16")	350 kgs (770 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1157-06-04-1	1157-06-04-2	1157-06-04-4	滾珠軸承 Ball Bearing	197mm (7-3/4")	活動 119 mm Swivel 119mm AK煞 160 mm Swivel W/AK Lock Brake 160mm
	400 kgs (880 lbs)	尼龍輪 Nylon	1157-06-07-1	1157-06-07-2	1157-06-07-4			
	350 kgs (770 lbs)	CPD輪 CPD	1157-06-49-1	1157-06-49-2	1157-06-49-4			
	300 kgs (660 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1157-06-11-1	1157-06-11-2	1157-06-11-4			
	300 kgs (660 lbs)	環保牽引NBR輪 Non-marking NBR Rubber on Cast	1157-06-90-1	1157-06-90-2	1157-06-90-4			
	350 kgs (770 lbs)	鋁芯QQ橡膠輪 Recilent rubber on AL Core	1157-06-89-1	1157-06-89-2	1157-06-89-4			
	400 kgs (880 lbs)	WMRC輪 WMRC	1157-06-45-1	1157-06-45-2	1157-06-45-4			



 輪徑×輪寬 Diameter x Width	 載重 Load	 材質 Material	型號			 軸承 Bearing	 總高 Overall Height	 迴旋半徑 Swivel radius
			固定	活動	煞車			
150mm x 42mm (6"x1-5/8")	410 kgs (900 lbs)	鐵芯聚氨酯 PU on Cast	1157-06-33-1	1157-06-33-2	1157-06-33-4	滾珠軸承 Ball Bearing	197mm (7-3/4")	活動 119 mm Swivel 119mm AK煞 160 mm Swivel W/AK Lock Brake 160mm
	400 kgs (880 lbs)	APU輪(圓弧) PU on AL Core (Round)	1157-06-108-1	1157-06-108-2	1157-06-108-4			
	450 kgs (990 lbs)	鋁芯AQPUP輪(圓弧) QPU on AL Core (Round)	1157-06-87-1	1157-06-87-2	1157-06-87-4			
	550 kgs (1200 lbs)	QPU輪(圓弧) QPU (Round)	1157-06-80-1	1157-06-80-2	1157-06-80-4			
	600 kgs (1320 lbs)	QPU輪(平面) QPU(Flat)	1157-06-80-1	1157-06-80-2	1157-06-80-4			
	500 kgs (1100 lbs)	VPU輪(圓弧) VPU (Round)	1157-06-82-1	1157-06-82-2	1157-06-82-4			
	670 kgs (1475 lbs)	VQPU輪(圓弧) VQPU (Round Shape)	1157-06-83-1	1157-06-83-2	1157-06-83-4			
	750 kgs (1650 lbs)	鐵芯VXPU輪(圓弧) XPU on Iron Core (Round)	1157-06-91-1	1157-06-91-2	1157-06-91-4			
	410 kgs (900 lbs)	EPU輪(圓弧) EPU (Round)	1157-06-78-1	1157-06-78-2	1157-06-78-4			
	460 kgs (1010 lbs)	EPU輪(平面) EPU (Flat)	1157-06-78-1	1157-06-78-2	1157-06-78-4			
	550 kgs (1200 lbs)	EQPU輪(圓弧) EQPU (Round)	1157-06-81-1	1157-06-81-2	1157-06-81-4			
	600 kgs (1320 lbs)	EQPU輪(平面) EQPU (Flat)	1157-06-81-1	1157-06-81-2	1157-06-81-4			
150mm x 45.5mm (6"x1-13/16")	260 kgs (570 lbs)	三星輪 Rubber on Cast	1157-06-03-1	1157-06-03-2	1157-06-03-4			
150mm x 50mm (6" x 2")	450 kgs (990 lbs)	APU輪(平面) PU on AL Core (Flat)	1157-06(50)-108-1	1157-06(50)-108-2	1157-06(50)-108-4			
	500 kgs (1100 lbs)	鋁芯AQPUP輪(平面) QPU on AL Core (Flat)	1157-06(50)-87-1	1157-06(50)-87-2	1157-06(50)-87-4			
	525 kgs (1155 lbs)	QPU輪(平面) QPU(Flat)	1157-06(50)-80-1	1157-06(50)-80-2	1157-06(50)-80-4			
	600 kgs (1320 lbs)	EPU輪(圓弧) EPU (Round)	1157-06(50)-78-1	1157-06(50)-78-2	1157-06(50)-78-4			
	600 kgs (1320 lbs)	EQPU輪(圓弧) EQPU (Round)	1157-06(50)-81-1	1157-06(50)-81-2	1157-06(50)-81-4			
150mm x 51mm	550 kgs (1210 lbs)	ZQPU輪(雙輪) ZQPU (Dual Wheels)	1157-06-101-1	1157-06-101-2	1157-06-101-4			
180mm x 44mm (7" x 1-3/4")	450 kgs (990 lbs)	APU輪(圓弧) PU on AL Core (Round)	1157-07-108-1	1157-07-108-2	1157-07-108-4			
	600 kgs (1320 lbs)	鋁芯AQPUP輪(圓弧) QPU on AL Core (Round)	1157-07-87-1	1157-07-87-2	1157-07-87-4			
180mm x 50mm (7" x 2")	450 kgs (990 lbs)	鐵芯聚氨酯 PU on Cast	1157-07-33-1	1157-07-33-2	1157-07-33-4	滾珠軸承 Ball Bearing	238mm (9-3/8")	活動 147 mm Swivel 47mm AK煞 179 mm Swivel W/AK Lock Brake 179mm
	600 kgs (1320 lbs)	QPU輪(圓弧) QPU(Round)	1157-07-80-1	1157-07-80-2	1157-07-80-4			
	650 kgs (1430 lbs)	VPU輪(圓弧) VPU (Round)	1157-07-82-1	1157-07-82-2	1157-07-82-4			
	650 kgs (1430 lbs)	鐵芯VXPU輪(圓弧) XPU on Iron Core (Round)	1157-07-91-1	1157-07-91-2	1157-07-91-4			
	650 kgs (1430 lbs)	VQPU輪(圓弧) VQPU (Round Shape)	1157-07-83-1	1157-07-83-2	1157-07-83-4			
193mm x 46mm (7-3/5"x1-13/16")	300 kgs (660 lbs)	三星輪 Rubber on Cast	1157-08-03-1	1157-08-03-2	—	滾珠軸承 Ball Bearing	244.5mm (9-5/8")	活動 159 mm Swivel 159mm
200mm x 44mm (8"x1-3/4")	350 kgs (770 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1157-08-04-1	1157-08-04-2	1157-08-04-4	滾珠軸承 Ball Bearing	248mm (9-3/4")	活動 157mm Swivel 157mm AK煞 178mm Swivel W/AK Lock Brake 178mm
	350 kgs (770 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1157-08-11-1	1157-08-11-2	1157-08-11-4			
	350 kgs (770 lbs)	環保牽引NBR輪 Non-marking NBR Rubber on Cast	1157-08-90-1	1157-08-90-2	1157-08-90-4			
	400 kgs (880 lbs)	鋁芯QQ橡膠輪 Recilent rubber on AL Core	1157-08-89-1	1157-08-89-2	1157-08-89-4			
200mm x 45.5mm (8"x1-13/16")	550 kgs (1200 lbs)	鑄輪 Cast Iron	1157-08-14-1	1157-08-14-2	1157-08-14-4			



 輪徑×輪寬 Diameter x Width	 載重 Load	 材質 Material	型號			 軸承 Bearing	 總高 Overall Height	 迴旋半徑 Swivel radius
			固定	活動	煞車			
200mm x 50mm (8" x 2")	450 kgs (990 lbs)	鐵芯聚氨酯 PU on Cast	1157-08-33-1	1157-08-33-2	1157-08-33-4	滾珠軸承 Ball Bearing	248mm (9-3/4")	活動 157 mm Swivel 157mm AK煞 178mm Swivel W/AK Lock Brake 178mm
	450 kgs (990 lbs)	尼龍輪 Nylon	1157-08-07-1	1157-08-07-2	1157-08-07-4			
	750 kgs (1650 lbs)	鐵芯聚氨酯(2050A/2050B) PU on Cast (2050A/2050B)	1157-08-62-1	1157-08-62-2	1157-08-62-4			
	400 kgs (880 lbs)	CPD輪 CPD	1157-08-49-1	1157-08-49-2	1157-08-49-4			
	450 kgs (990 lbs)	WMRC輪 WMRC	1157-08-45-1	1157-08-45-2	1157-08-45-4			
	500 kgs (1100 lbs)	APU輪(圓弧) PU on AL Core (Round)	1157-08-108-1	1157-08-108-2	1157-08-108-4			
	550 kgs (1200 lbs)	APU輪(平面) PU on AL Core (Flat)	1157-08-108-1	1157-08-108-2	1157-08-108-4			
	650 kgs (1430 lbs)	鋁芯AQPUL輪(平面) QPU on AL Core (Flat)	1157-08-87-1	1157-08-87-2	1157-08-87-4			
	700 kgs (1540 lbs)	鋁芯AQPUL輪(圓弧) QPU on AL Core (Round)	1157-08-87-1	1157-08-87-2	1157-08-87-4			
	670 kgs (1475 lbs)	QPU輪(圓弧) QPU (Round)	1157-08-80-1	1157-08-80-2	1157-08-80-4			
	720 kgs (1580 lbs)	QPU輪(平面) QPU (Flat)	1157-08-80-1	1157-08-80-2	1157-08-80-4			
	670 kgs (1475 lbs)	VPU輪(圓弧) VPU (Round)	1157-08-82-1	1157-08-82-2	1157-08-82-4			
	750 kgs (1650 lbs)	VQPU輪(圓弧) VQPU (Round)	1157-08-83-1	1157-08-83-2	1157-08-83-4			
	750 kgs (1650 lbs)	鐵芯VXPU輪(圓弧) XPU on Iron Core (Round)	1157-08-91-1	1157-08-91-2	1157-08-91-4			
	650 kgs (1430 lbs)	EPU輪(圓弧) EPU (Round Shape)	1157-08-78-1	1157-08-78-2	1157-08-78-4			
	700 kgs (1540 lbs)	EPU輪(平面) EPU (Flat Shape)	1157-08-78-1	1157-08-78-2	1157-08-78-4			
	750 kgs (1650 lbs)	EQPU輪(圓弧) EQPU (Round Shape)	1157-08-81-1	1157-08-81-2	1157-08-81-4			
750 kgs (1650 lbs)	EQPU輪(平面) EQPU (Flat Shape)	1157-08-81-1	1157-08-81-2	1157-08-81-4				
200mm x 51mm (8" x 2")	650 kgs (1430 lbs)	ZQPU輪(雙輪) ZQPU (Dual Wheels)	1157-08-101-1	1157-08-101-2	1157-08-101-4			