




1155 Series

全塑-1系列

STAT Series Caster (All Plastic)

- ◉ 无污染 ◉ 超静音 ◉ 防生锈 ◉ 弹性佳
- ◉ 低阻力 ◉ 转动灵活 ◉ 耐冲材质 ◉ 专利产品
- ◉ 产品轻量化且坚固耐用
- ◉ 可另选购有抗菌效果之全效轮或TPR轮
- ◉ 适用于医疗器材设备、家具置物架、食品工厂、学校、办公室等场所。
- ◉ 另有不锈钢材质的五金件可供选择
- ◉ 可提供无磁脚轮

- High grade synthetic housing
Smooth and easy rolling, these casters noticeably reduce the effort to operate equipment
Highly effective Thread guards prevent failure from strings and other debris.
Specifically designed for healthcare and institutional applications where silence is essential.
Corrosion resistant with non-marking wheels
- Ball bearing swivel head
- Directional lock also available
- Stainless steel components are also available
- Magnetic Free Caster also available

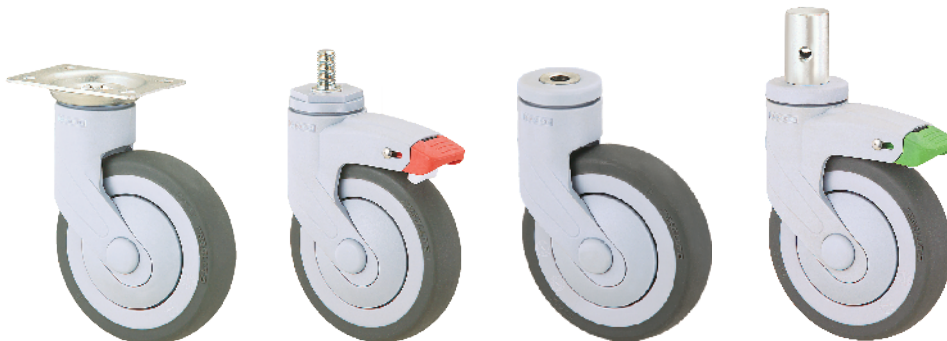

» 特色区 Features



双刹
Total Lock Brake



定向刹
Directional Lock Brake



长踏板
Long Pedal



超长踏板
Extra Long Pedal



无磁脚轮
Magnetic Free Caster



导电轮
E-Conductive

搭配导电轮时，脚架上的车心防尘盖会做黄色，以做区分
E-conductive wheel,
Precision ball bearing,
Non-marking

» 轮子选项 Wheel Options



全效轮
Resolute



超级人造胶
TPR on PP Core



导电轮
E-Conductive



铝芯AQPU
QPU on AL Core



滚珠轴承
Ball Bearing

中管
Plain Bearing



超级人造胶(大圆弧)
TPR on PP Core (Dount)



全效轮(大圆弧)
Resolute (Dount)



» 底板规格 TOP PLATE SIZE AND BOLT HOLE SPACING

规格 Size	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安装尼帽尺寸 Attaching Bolt Size
3"	42X42mm	32X32mm *	M4/M5
3"	60X60mm	42.5X42.5mm *	M6
3"	62X94mm	45X75mm(高级底板) *	M8
3"	69X96mm	49X74.5mm(斜孔底板) *	M8
4" 5"	69X96mm	45X75mm(高级底板) *	M8
3" 4" 5"	69X96mm	49X74.5mm(斜孔底板) *	M8

* 有固定架和定向活动架可供选择 (Fixed Caster and Directional Swivel Caster is available. Please consult the factory.)

» 插杆规格 CYLINDRICAL STEM SPECIFICATION

规格 Size	插杆直径 X 长度 Diameter x Length	孔位高度 Hole Height	孔尺寸 Bore Size
3"	11X22mm	—	C型环 (Grip Ring)
3"	11X38mm	—	C型铜扣环 (Grip Ring)
4" 5"	21.6X56mm	—	C型环 (Grip Ring)
4" 5"	21.5X44.5mm	25.4mm *	#10 X 24UNC+C型环 (Grip Ring)
4" 5"	28X30mm	19mm *	M8
4" 5"	28X40mm	19mm *	M8

* 有固定架和定向活动架可供选择 (Fixed Caster and Directional Swivel Caster is available. Please consult the factory.)

» 丝扣规格 THREADED STEM SPECIFICATION

规格 Size	丝扣牙径 X 长度 Threaded Size	规格 Size	丝扣牙径 X 长度 Threaded Size
3"	3/8-16UNCX25mm	3"	M10X15mm
3"	M12X25mm	4" 5"	3/8-16UNCX32mm
4" 5"	M12X25mm	4" 5"	M12X25mm (不锈钢SS)
4" 5"	1/2-12UNCX25mm	4" 5"	1/2-20UNCX25mm (不锈钢SS)
4" 5"	M16X30mm		

» 空铆规格 SINGLE BOLT HOLE

规格 Size	孔径 Centre Hole	规格 Size	孔径 Centre Hole
3" 4" 5"	10.5mm	4" 5"	12.5mm



 轮径x轮宽 DiameterxWidth	 规 格 Specification	 载重 Load	 材质 Material	 品号 Item No.				 轴承 Bearing	 总高 Overall Height	 偏心距 Offset	 回旋半径 Swivel radius
				固定 Fixed	活动 Swivel	双刹 Total Lock Brack	定向刹 Directional Lock				
75mmx25mm (3"x1")	四角底板 Plate	75kgs (165lbs)	全效轮 Resolute	1155-03-68-1	1155-03-68-2	1155-03-68-4	—	滚珠轴承 Ball Bearing	113mm	27mm	活动 64.5mm 刹车(短踏板) 75mm 刹车(长踏板) 88mm
		65kgs (143lbs)	导电轮 E-conductive	1155-03-17-1	1155-03-17-2	1155-03-17-4	—	滚珠轴承 Ball Bearing			
		75kgs (165lbs)	超级人造胶 TPR on PP Core	1155-03-75-1	1155-03-75-2	1155-03-75-4	—	滚珠轴承 Ball Bearing			
	丝扣 Threaded Stem	75kgs (165lbs)	全效轮 Resolute	—	1155-03-68-2	1155-03-68-4	—	滚珠轴承 Ball Bearing	107mm		
		65kgs (143lbs)	导电轮 E-conductive	—	1155-03-17-2	1155-03-17-4	—	滚珠轴承 Ball Bearing			
		75kgs (165lbs)	超级人造胶 TPR on PP Core	—	1155-03-75-2	1155-03-75-4	—	滚珠轴承 Ball Bearing			
	空铆 Single Bolt Hole	75kgs (165lbs)	全效轮 Resolute	—	1155-03-68-2	1155-03-68-4	—	滚珠轴承 Ball Bearing	104mm		Swivel 64.5mm Swivel W/Brake (Short pedal) 75mm Swivel W/Brake (Long pedal) 88mm
		65kgs (143lbs)	导电轮 E-conductive	—	1155-03-17-2	1155-03-17-4	—	滚珠轴承 Ball Bearing			
		75kgs (165lbs)	超级人造胶 TPR on PP Core	—	1155-03-75-2	1155-03-75-4	—	滚珠轴承 Ball Bearing			
	插杆 Cylindrical Stem	75kgs (165lbs)	全效轮 Resolute	1155-03-68-1	1155-03-68-2	1155-03-68-4	—	滚珠轴承 Ball Bearing	104mm		
		65kgs (143lbs)	导电轮 E-conductive	1155-03-17-1	1155-03-17-2	1155-03-17-4	—	滚珠轴承 Ball Bearing			
		75kgs (165lbs)	超级人造胶 TPR on PP Core	1155-03-75-1	1155-03-75-2	1155-03-75-4	—	滚珠轴承 Ball Bearing			
100mmx24mm (4"x15/16")	四角底板 Plate	60kgs (132lbs)	经典超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	滚珠轴承 Ball Bearing	141mm	36mm	活动 86mm 刹车(短踏板) 102mm 刹车(长踏板) 113mm 刹车(超长踏板) 126mm
		60kgs (132lbs)	经典全效轮 Resolute	1155-04-68-1	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
		50kgs (110lbs)	经典超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	中管 Plain Bearing			
		50kgs (110lbs)	经典全效轮 Resolute	1155-04-68-1	1155-04-68-2	1155-04-68-4	1155-04-68-9	中管(无防尘盖) Plain Bearing			
		90kgs (198lbs)	全效轮 Resolute	1155-04-68-1	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
		80kgs (176lbs)	经典全效轮 Resolute	1155-04-68-1	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
		90kgs (198lbs)	导电轮 E-conductive	1155-04-17-1	1155-04-17-2	1155-04-17-4	1155-04-17-9	滚珠轴承 Ball Bearing			
		90kgs (198lbs)	超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing			
		80kgs (176lbs)	经典超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing			
		80kgs (176lbs)	经典超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	中管(无防尘盖) Plain Bearing			
		90kgs (198lbs)	铝芯AQPU QPU on AL Core	1155-04-87-1	1155-04-87-2	1155-04-87-4	1155-04-87-9	滚珠轴承 Ball Bearing			
		80kgs (176lbs)	超级人造胶(大圆弧) TPR on PP Core(Dount)	1155-04-110-1	1155-04-110-2	1155-04-110-4	1155-04-110-9	滚珠轴承 Ball Bearing			
		90kgs (198lbs)	全效轮(大圆弧) Resolute(Dount)	1155-04-111-1	1155-04-111-2	1155-04-111-4	1155-04-111-9	滚珠轴承 Ball Bearing			



 轮径x轮宽 DiameterxWidth	规 格 Specification	 载重 Load	 材质 Material	 品号 Item No.				 轴承 Bearing	 总高 Overall Height	 偏心距 Offset	 回旋半径 Swivel radius
				固定 Fixed	活动 Swivel	双刹 Total Lock Brack	定向刹 Directional Lock				
100mmx24mm (4"x15/16")	丝扣 Threaded Stem	60kgs (132lbs)	经典超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	—	滚珠轴承 Ball Bearing	139mm	36mm	活动 86mm 刹车(短踏板) 102mm 刹车(长踏板) 113mm 刹车(超长踏板) 126mm
		60kgs (132lbs)	经典全效轮 Resolute	—	1155-04-68-2	1155-04-68-4	—	滚珠轴承 Ball Bearing			
		50kgs (110lbs)	经典超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	—	中管 Plain Bearing			
		50kgs (110lbs)	经典全效轮 Resolute	—	1155-04-68-2	1155-04-68-4	—	中管(无防尘盖) Plain Bearing			
90kgs (198lbs)		全效轮 Resolute	—	1155-04-68-2	1155-04-68-4	—	滚珠轴承 Ball Bearing				
80kgs (176lbs)		经典全效轮 Resolute	—	1155-04-68-2	1155-04-68-4	—	滚珠轴承 Ball Bearing				
90kgs (198lbs)		导电轮 E-conductive	—	1155-04-17-2	1155-04-17-4	—	滚珠轴承 Ball Bearing				
90kgs (198lbs)		超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	—	滚珠轴承 Ball Bearing 中管 Plain Bearing				
80kgs (176lbs)		经典超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	—	滚珠轴承 Ball Bearing 中管 Plain Bearing				
80kgs (176lbs)		经典超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	—	中管(无防尘盖) Plain Bearing				
90kgs (198lbs)		铝芯AQP QPU on AL Core	—	1155-04-87-2	1155-04-87-4	—	滚珠轴承 Ball Bearing				
80kgs (176lbs)		超级人造胶(大圆弧) TPR on PP Core(Dount)	—	1155-04-110-2	1155-04-110-4	—	滚珠轴承 Ball Bearing				
90kgs (198lbs)		全效轮(大圆弧) Resolute(Dount)	—	1155-04-111-2	1155-04-111-4	—	滚珠轴承 Ball Bearing				
100mmx24mm (4"x15/16")		空铆 Single Bolt Hole	60kgs (132lbs)	经典超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	1155-04-75-9			
	60kgs (132lbs)		经典全效轮 Resolute	—	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
	50kgs (110lbs)		经典超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	1155-04-75-9	中管 Plain Bearing			
	50kgs (110lbs)		经典全效轮 Resolute	—	1155-04-68-2	1155-04-68-4	1155-04-68-9	中管(无防尘盖) Plain Bearing			
	90kgs (198lbs)		全效轮 Resolute	—	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
	80kgs (176lbs)		经典全效轮 Resolute	—	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
	90kgs (198lbs)		导电轮 E-conductive	—	1155-04-17-2	1155-04-17-4	1155-04-17-9	滚珠轴承 Ball Bearing			
	90kgs (198lbs)		超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	1155-04-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing			
	80kgs (176lbs)		经典超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	1155-04-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing			
	80kgs (176lbs)		经典超级人造胶 TPR on PP Core	—	1155-04-75-2	1155-04-75-4	1155-04-75-9	中管(无防尘盖) Plain Bearing			
	90kgs (198lbs)		铝芯AQP QPU on AL Core	—	1155-04-87-2	1155-04-87-4	1155-04-87-9	滚珠轴承 Ball Bearing			
	80kgs (176lbs)		超级人造胶(大圆弧) TPR on PP Core(Dount)	—	1155-04-110-2	1155-04-110-4	1155-04-110-9	滚珠轴承 Ball Bearing			
	90kgs (198lbs)		全效轮(大圆弧) Resolute(Dount)	—	1155-04-111-2	1155-04-111-4	1155-04-111-9	滚珠轴承 Ball Bearing			



 轮径x轮宽 Diameter×Width	规 格 Specification	 载重 Load	 材质 Material	 品号 Item No.				 轴承 Bearing	 总高 Overall Height	 偏心距 Offset	 回旋半径 Swivel radius
				固定 Fixed	活动 Swivel	双刹 Total Lock Brack	定向刹 Directional Lock				
100mmx24mm (4"x15/16")	插杆 Cylindrical Stem	60kgs (132lbs)	经典超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	滚珠轴承 Ball Bearing	138mm	36mm	活动 86mm 刹车(短踏板) 102mm 刹车(长踏板) 113mm 刹车(超长踏板) 126mm Swivel 86mm Swivel W/Brake (Short pedal) 102mm Swivel W/Brake (Long pedal) 113mm Swivel W/Brake (Extra long pedal) 126mm
		60kgs (132lbs)	经典全效轮 Resolute	1155-04-68-1	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
		50kgs (110lbs)	经典超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	中管 Plain Bearing			
		50kgs (110lbs)	经典全效轮 Resolute	1155-04-68-1	1155-04-68-2	1155-04-68-4	1155-04-68-9	中管(无防尘盖) Plain Bearing			
100mmx31mm (4"x1-1/4")		90kgs (198lbs)	全效轮 Resolute	1155-04-68-1	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
		80kgs (176lbs)	经典全效轮 Resolute	1155-04-68-1	1155-04-68-2	1155-04-68-4	1155-04-68-9	滚珠轴承 Ball Bearing			
		90kgs (198lbs)	导电轮 E-conductive	1155-04-17-1	1155-04-17-2	1155-04-17-4	1155-04-17-9	滚珠轴承 Ball Bearing			
		90kgs (198lbs)	超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing			
		80kgs (176lbs)	经典超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing			
		80kgs (176lbs)	经典超级人造胶 TPR on PP Core	1155-04-75-1	1155-04-75-2	1155-04-75-4	1155-04-75-9	中管(无防尘盖) Plain Bearing			
		90kgs (198lbs)	铝芯AQPU QPU on AL Core	1155-04-87-1	1155-04-87-2	1155-04-87-4	1155-04-87-9	滚珠轴承 Ball Bearing			
		80kgs (176lbs)	超级人造胶(大圆弧) TPR on PP Core(Dount)	1155-04-110-1	1155-04-110-2	1155-04-110-4	1155-04-110-9	滚珠轴承 Ball Bearing			
		90kgs (198lbs)	全效轮(大圆弧) Resolute(Dount)	1155-04-111-1	1155-04-111-2	1155-04-111-4	1155-04-111-9	滚珠轴承 Ball Bearing			
125mmx24.5mm (5"x31/32")	四角底板 Plate	80kgs (176lbs)	经典超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	滚珠轴承 Ball Bearing	166mm	38mm	活动 100.5mm 刹车(短踏板) 102mm 刹车(长踏板) 113mm 刹车(超长踏板) 126mm Swivel 100.5mm Swivel W/Brak (Short pedal) 102mm Swivel W/Brake (Long pedal) 113mm Swivel W/Brake (Extra long pedal) 126mm
		80kgs (176lbs)	经典全效轮 Resolute	1155-05-68-1	1155-05-68-2	1155-05-68-4	1155-05-68-9	滚珠轴承 Ball Bearing			
		70kgs (154lbs)	经典超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	中管 Plain Bearing			
		70kgs (154lbs)	经典全效轮 Resolute	1155-05-68-1	1155-05-68-2	1155-05-68-4	1155-05-68-9	中管(无防尘盖) Plain Bearing			
		100kgs (220lbs)	全效轮 Resolute	1155-05-68-1	1155-05-68-2	1155-05-68-4	1155-05-68-9	滚珠轴承 Ball Bearing			
		90kgs (198lbs)	经典全效轮 Resolute	1155-05-68-1	1155-05-68-2	1155-05-68-4	1155-05-68-9	滚珠轴承 Ball Bearing			
		100kgs (220lbs)	导电轮 E-conductive	1155-05-17-1	1155-05-17-2	1155-05-17-4	1155-05-17-9	滚珠轴承 Ball Bearing			
		100kgs (220lbs)	超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing			
		90kgs (198lbs)	经典超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing			
		90kgs (198lbs)	经典超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	中管(无防尘盖) Plain Bearing			
		100kgs (220lbs)	铝芯AQPU QPU on AL Core	1155-05-87-1	1155-05-87-2	1155-05-87-4	1155-05-87-9	滚珠轴承 Ball Bearing			
		90kgs (198lbs)	超级人造胶(大圆弧) TPR on PP Core(Dount)	1155-05-110-1	1155-05-110-2	1155-05-110-4	1155-05-110-9	滚珠轴承 Ball Bearing			
		100kgs (220lbs)	全效轮(大圆弧) Resolute(Dount)	1155-05-111-1	1155-05-111-2	1155-05-111-4	1155-05-111-9	滚珠轴承 Ball Bearing			



 轮径x轮宽 Diameter×Width	规 格 Specification	 载重 Load	 材质 Material	 品号 Item No.				 轴承 Bearing	 总高 Overall Height	 偏心距 Offset	 回旋半径 Swivel radius	
				固定 Fixed	活动 Swivel	双刹 Total Lock Brack	定向刹 Directional Lock					
125mmx24.5mm (5"x31/32")	丝扣 Threaded Stem	80kgs (176lbs)	经典超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	—	滚珠轴承 Ball Bearing	164mm	38mm	活动100.5mm 刹车(短踏板) 102mm 刹车(长踏板) 113mm 刹车(超长踏板) 126mm	
		80kgs (176lbs)	经典全效轮 Resolute	—	1155-05-68-2	1155-05-68-4	—	滚珠轴承 Ball Bearing				
		70kgs (154lbs)	经典超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	—	中管 Plain Bearing				
		70kgs (154lbs)	经典全效轮 Resolute	—	1155-05-68-2	1155-05-68-4	—	中管(无防尘盖) Plain Bearing				
125mmx31mm (5"x1-1/4")		100kgs (220lbs)	全效轮 Resolute	—	1155-05-68-2	1155-05-68-4	—	滚珠轴承 Ball Bearing				
		90kgs (198lbs)	经典全效轮 Resolute	—	1155-05-68-2	1155-05-68-4	—	滚珠轴承 Ball Bearing				
		100kgs (220lbs)	导电轮 E-conductive	—	1155-05-17-2	1155-05-17-4	—	滚珠轴承 Ball Bearing				
		100kgs (220lbs)	超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	—	滚珠轴承 Ball Bearing 中管 Plain Bearing				
		90kgs (198lbs)	经典超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	—	滚珠轴承 Ball Bearing 中管 Plain Bearing				
		90kgs (198lbs)	经典超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	—	中管(无防尘盖) Plain Bearing				
		100kgs (220lbs)	铝芯AQPU QPU on AL Core	—	1155-05-87-2	1155-05-87-4	—	滚珠轴承 Ball Bearing				
		90kgs (198lbs)	超级人造胶(大圆弧) TPR on PP Core(Dount)	—	1155-05-110-2	1155-05-110-4	—	滚珠轴承 Ball Bearing				
100kgs (220lbs)	全效轮(大圆弧) Resolute(Dount)	—	1155-05-111-2	1155-05-111-4	—	滚珠轴承 Ball Bearing						
125mmx24.5mm (5"x31/32")	空铆 Single Bolt Hole	80kgs (176lbs)	经典超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	1155-04-75-9	滚珠轴承 Ball Bearing	163mm			
		80kgs (176lbs)	经典全效轮 Resolute	—	1155-05-68-2	1155-05-68-4	1155-04-68-9	滚珠轴承 Ball Bearing				
		70kgs (154lbs)	经典超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	1155-04-75-9	中管 Plain Bearing				
		70kgs (154lbs)	经典全效轮 Resolute	—	1155-05-68-2	1155-05-68-4	1155-04-68-9	中管(无防尘盖) Plain Bearing				
		125mmx31mm (5"x1-1/4")	100kgs (220lbs)	全效轮 Resolute	—	1155-05-68-2	1155-05-68-4	1155-04-68-9				滚珠轴承 Ball Bearing
			90kgs (198lbs)	经典全效轮 Resolute	—	1155-05-68-2	1155-05-68-4	1155-04-68-9				滚珠轴承 Ball Bearing
			100kgs (220lbs)	导电轮 E-conductive	—	1155-05-17-2	1155-05-17-4	1155-04-17-9				滚珠轴承 Ball Bearing
			100kgs (220lbs)	超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	1155-04-75-9				滚珠轴承 Ball Bearing 中管 Plain Bearing
			90kgs (198lbs)	经典超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	1155-04-75-9				滚珠轴承 Ball Bearing 中管 Plain Bearing
			90kgs (198lbs)	经典超级人造胶 TPR on PP Core	—	1155-05-75-2	1155-05-75-4	1155-04-75-9				中管(无防尘盖) Plain Bearing
		100kgs (220lbs)	铝芯AQPU QPU on AL Core	—	1155-05-87-2	1155-05-87-4	1155-04-87-9	滚珠轴承 Ball Bearing				
		90kgs (198lbs)	超级人造胶(大圆弧) TPR on PP Core(Dount)	—	1155-05-110-2	1155-05-110-4	1155-04-110-9	滚珠轴承 Ball Bearing				
100kgs (220lbs)		全效轮(大圆弧) Resolute(Dount)	—	1155-05-111-2	1155-05-111-4	1155-04-111-9	滚珠轴承 Ball Bearing					



 轮径x轮宽 Diameter×Width	规 格 Specification	 载重 Load	 材质 Material	 品号 Item No.				 轴承 Bearing	 总高 Overall Height	 偏心距 Offset	 回旋半径 Swivel radius
				固定 Fixed	活动 Swivel	双刹 Total Lock Brack	定向刹 Directional Lock				
125mmx24.5mm (5"x31/32")	插杆 Cylindrical Stem	80kgs (176lbs)	经典超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	滚珠轴承 Ball Bearing	163mm	38mm	活动100.5mm 刹车(短踏板) 102mm 刹车(长踏板) 113mm 刹车(超长踏板) 126mm Swivel 100.5mm Swivel W/Brak (Short pedal) 102mm Swivel W/Brake (Long pedal) 113mm Swivel W/Brake (Extra long pedal) 126mm
		80kgs (176lbs)	经典全效轮 Resolute	1155-05-68-1	1155-05-68-2	1155-05-68-4	1155-05-68-9	滚珠轴承 Ball Bearing			
		70kgs (154lbs)	经典超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	中管 Plain Bearing			
		70kgs (154lbs)	经典全效轮 Resolute	1155-05-68-1	1155-05-68-2	1155-05-68-4	1155-05-68-9	中管(无防尘盖) Plain Bearing			
100kgs (220lbs)		全效轮 Resolute	1155-05-68-1	1155-05-68-2	1155-05-68-4	1155-05-68-9	滚珠轴承 Ball Bearing				
90kgs (198lbs)		经典全效轮 Resolute	1155-05-68-1	1155-05-68-2	1155-05-68-4	1155-05-68-9	滚珠轴承 Ball Bearing				
100kgs (220lbs)		导电轮 E-conductive	1155-05-17-1	1155-05-17-2	1155-05-17-4	1155-05-17-9	滚珠轴承 Ball Bearing				
100kgs (220lbs)		超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing				
90kgs (198lbs)		经典超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	滚珠轴承 Ball Bearing 中管 Plain Bearing				
90kgs (198lbs)		经典超级人造胶 TPR on PP Core	1155-05-75-1	1155-05-75-2	1155-05-75-4	1155-05-75-9	中管(无防尘盖) Plain Bearing				
100kgs (220lbs)		铝芯AQP QPU on AL Core	1155-05-87-1	1155-05-87-2	1155-05-87-4	1155-05-87-9	滚珠轴承 Ball Bearing				
90kgs (198lbs)		超级人造胶(大圆弧) TPR on PP Core(Dount)	1155-05-110-1	1155-05-110-2	1155-05-110-4	1155-05-110-9	滚珠轴承 Ball Bearing				
100kgs (220lbs)		全效轮(大圆弧) Resolute(Dount)	1155-05-111-1	1155-05-111-2	1155-05-111-4	1155-05-111-9	滚珠轴承 Ball Bearing				
125mmx31mm (5"x1-1/4")											