


## EPU系列

### 重型轮(特厚胶)

### 大圆弧形/平面PU外包

### +铁芯/铸铁芯

|                                                                                     |      |                                                                                     |                |
|-------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------------|----------------|
|  | 轮面硬度 |  | 92° shore A    |
|  | 温度范围 |  | -30°C to +70°C |
|  | 滚动顺畅 |  | 优秀             |
|  | 音量   |  | 良好             |
|  | 保护地板 |  | 良好             |

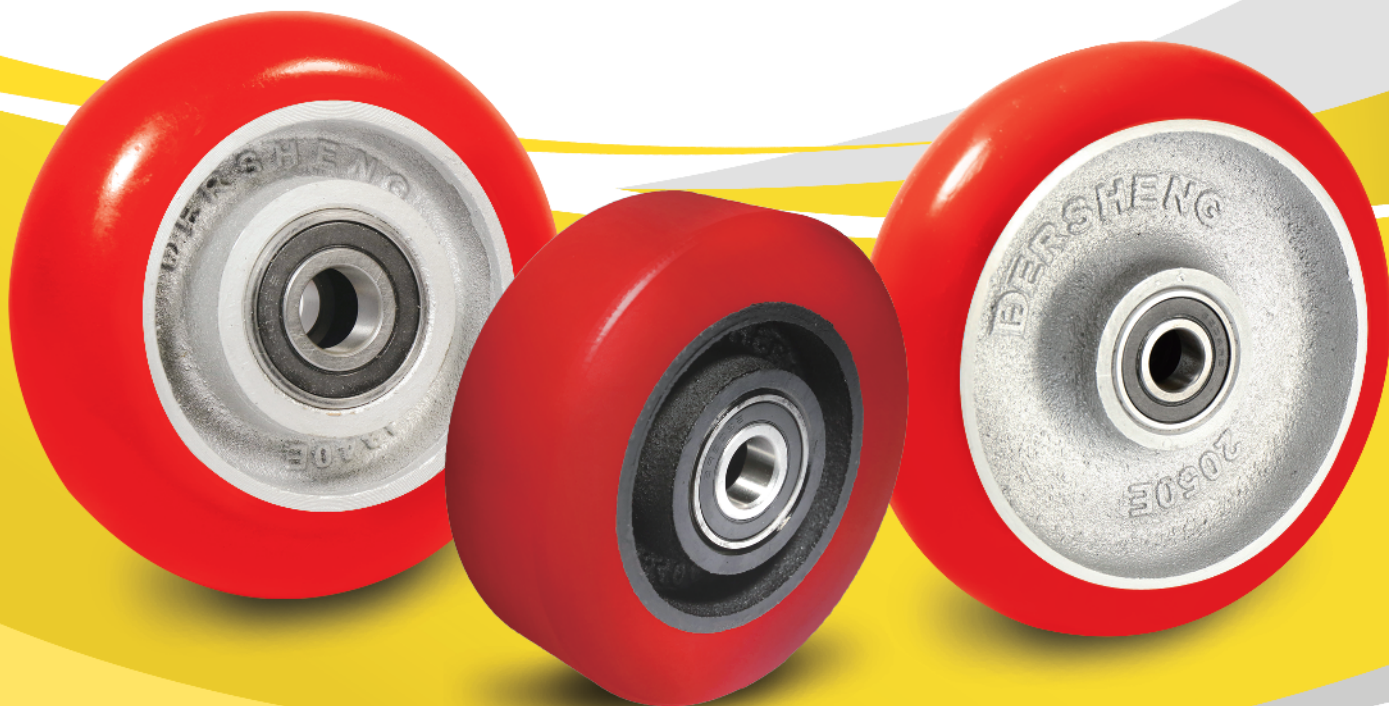

#### 轮面


由高品质聚氨酯制成。得胜硬度92°的PU轮不仅能提供良好的地板保护作用，而且低噪音。得胜PU轮有着优秀的抗水解特性，适用热带地区及潮湿的工作环境。

#### 轮框

内框：铁芯/铸铁芯

#### 特色

- 抗化学、溶剂及侵蚀
- 耐磨
- 抗微生物
- 适用环境温度：-30°C ~ +70°C
- 在正常使用情况下，无需维修

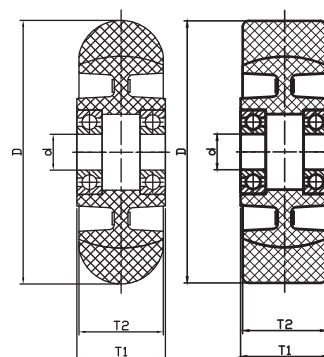

| 品号             | 轮径<br>(D) [mm] | 轮宽<br>(T2) [mm] | 载重<br>[kg(lbs)]   | 轴承内径<br>Ø(d) [mm] | 中宽<br>(T1) [mm] | 轮面  | 轴承         |
|----------------|----------------|-----------------|-------------------|-------------------|-----------------|-----|------------|
| 12035205156171 | 125            | 40              | 550 kgs (1213lbs) | 17                | 42              | 大圆弧 | 精密滚珠<br>轴承 |
| 12035205206180 | 125            | 50              | 600 kgs (1323lbs) | 13                | 62              |     |            |
| 12035206186171 | 150            | 42              | 650 kgs (1433lbs) | 17                | 42              |     |            |
| 12035206206180 | 150            | 50              | 700 kgs (1543lbs) | 13                | 62              |     |            |
| 12035208206180 | 200            | 50              | 800 kgs (1764lbs) | 13                | 62              |     |            |
| 12035208206171 | 200            | 50              | 800 kgs (1764lbs) | 20                | 50              |     |            |
| 12035208206271 | 200            | 50              | 800 kgs (1764lbs) | 25                | 50              | 平面  |            |
| 12035205156271 | 125            | 40              | 600 kgs (1323lbs) | 17                | 42              |     |            |
| 12035206186271 | 150            | 42              | 700 kgs (1543lbs) | 17                | 42              |     |            |
| 12035208206371 | 200            | 50              | 850 kgs (1874lbs) | 20                | 50              |     |            |
| 12035208206471 | 200            | 50              | 850 kgs (1874lbs) | 25                | 50              |     |            |

