




1145 Series 彈簧輪抗衝擊系列 Spring-loaded Caster

- 屬得勝專利產品，避震，超重負載且高抗衝擊，在搬運過程可避免腳架變形扭曲，多款供選擇。採用超厚板材及高級彈簧，品質、工藝明顯優於市場上同類產品。
- DERSHENG'S patented products, shock-absorbing, heavy duty Kingpinless casters with hardened raceways for greater impact resistance to avoid distortions under heavy load. Made of super thick steel and high quality spring, outperforming most products from competitors.

載重 Load
150-550 kg

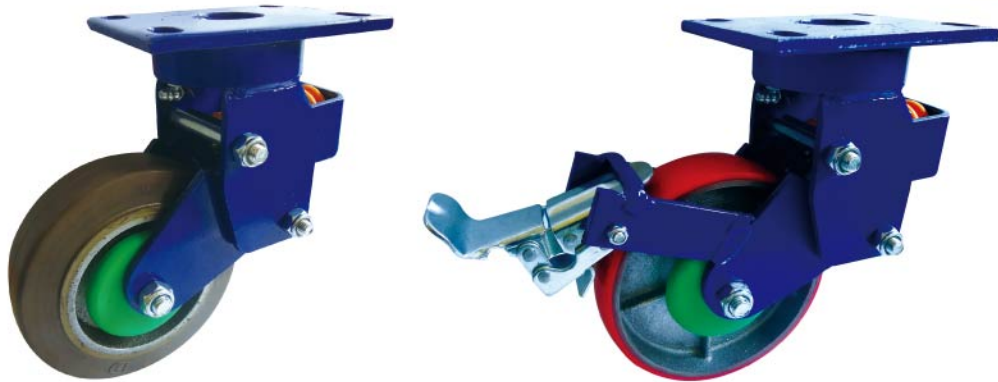

▶ 特色區 Features



無鉚釘設計
Kingpinless



輪子可耐防塵蓋
Thread guard



PU輪面可以變化硬度
Different PU
tread hardness available



滾珠軸承
Ball Bearing

▶ 輪子選項 Wheel Options



鐵芯聚氨酯
PU on Cast



鐵芯NBR橡膠輪
NBR Rubber on Cast



環保NBR橡膠輪
Non-marking Rubber on Cast



QPU輪
QPU



EPU輪
EPU



EQPU輪
EQPU



VPU輪
VPU



VQPU輪
VQPU

▶ 底板規格 TOP PLATE SIZE AND BOLT HOLE SPACING

編號 Suffix	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安裝尼帽尺寸 Attaching Bolt Size
1	110 x 140 mm (4-1/3"x 5-1/2")	75~80 x 110 mm (3-1/8"x 4-5/16")	12.7 mm (1/2")
2	115 x 160 mm (4-1/2"x 6-1/4")	75 x 130 mm (2-7/16"~3-3/8"x 4-15/16"~5-1/4")	12.7 mm (1/2")



輪徑×輪寬 Diameter×Width	載重 Load	材質 Material	型號 Item No.			軸承 Bearing	總高 Overall Height	迴旋半徑 Swivel radius
			固定 Fixed	活動 Swivel	剎車 Brake			
100mm×38mm (4"×1-1/2")	150 kgs (330 lbs)	鐵芯聚氨酯 PU on Cast	1145-04-33-1	1145-04-33-2	1145-04-33-4	滾珠 Ball Bearing	196mm (7-11/16")	活動96mm 煞車165mm Swivel 96mm Swivel W/Center lock 165mm
	150 kgs (330 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-04-04-1	1145-04-04-2	1145-04-04-4			
	150 kgs (330 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1145-04-11-1	1145-04-11-2	1145-04-11-4			
	250 kgs (550 lbs)	QPU輪 QPU	1145-04-80-1	1145-04-80-2	1145-04-80-4			
125mm×42mm (5"×1-5/8")	200 kgs (440 lbs)	鐵芯聚氨酯 PU on Cast	1145-05-33-1	1145-05-33-2	1145-05-33-4	滾珠 Ball Bearing	210mm (8-1/4")	活動129.5mm 煞車208mm Swivel 129.5m Swivel W/Center lock 208mm
	200 kgs (440 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-05-04-1	1145-05-04-2	1145-05-04-4			
	200 kgs (440 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1145-05-11-1	1145-05-11-2	1145-05-11-4			
	350 kgs (770 lbs)	QPU輪 QPU	1145-05-80-1	1145-05-80-2	1145-05-80-4			
	250 kgs (550 lbs)	EPU輪 EPU	1145-05-78-1	1145-05-78-2	1145-05-78-4			
	350 kgs (770 lbs)	EQPU輪 EQPU	1145-05-81-1	1145-05-81-2	1145-05-81-4			
150mm×42mm (6"×1-5/8")	250 kgs (550 lbs)	鐵芯聚氨酯 PU on Cast	1145-06-33-1	1145-06-33-2	1145-06-33-4	滾珠 Ball Bearing	225mm (8-13/16")	活動142mm 煞車221mm Swivel 142mm Swivel W/Center lock 221mm
	250 kgs (550 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-06-04-1	1145-06-04-2	1145-06-04-4			
	250 kgs (550 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1145-06-11-1	1145-06-11-2	1145-06-11-4			
	400 kgs (880 lbs)	QPU輪 QPU	1145-06-80-1	1145-06-80-2	1145-06-80-4			
	300 kgs (660 lbs)	EPU輪 EPU	1145-06-78-1	1145-06-78-2	1145-06-78-4			
	400 kgs (880 lbs)	EQPU輪 EQPU	1145-06-81-1	1145-06-81-2	1145-06-81-4			
	400 kgs (880 lbs)	VPU輪 VPU	1145-06-82-1	1145-06-82-2	1145-06-82-4			
	500 kgs (1100 lbs)	VQPU輪 VQPU	1145-06-83-1	1145-06-83-2	1145-06-83-4			
150mm×48mm (6" x1-7/8")	250 kgs (550 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-06-04-1	1145-06-04-2	1145-06-04-4	滾珠 Ball Bearing	280mm (11")	活動179mm 煞車250mm Swivel 179mm Swivel W/Center lock 250mm
	250 kgs (550 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1145-06-11-1	1145-06-11-2	1145-06-11-4			
200mm×48mm (8"×1-7/8")	300 kgs (660 lbs)	鐵芯聚氨酯 PU on Cast	1145-08-33-1	1145-08-33-2	1145-08-33-4	滾珠 Ball Bearing	280mm (11")	活動179mm 煞車250mm Swivel 179mm Swivel W/Center lock 250mm
	300 kgs (660 lbs)	鐵芯NBR橡膠輪 NBR Rubber on Cast	1145-08-04-1	1145-08-04-2	1145-08-04-4			
	300 kgs (660 lbs)	環保NBR橡膠輪 Non-marking Rubber on Cast	1145-08-11-1	1145-08-11-2	1145-08-11-4			
	450 kgs (990 lbs)	QPU輪 QPU	1145-08-80-1	1145-08-80-2	1145-08-80-4			
	350 kgs (770 lbs)	EPU輪 EPU	1145-08-78-1	1145-08-78-2	1145-08-78-4			
	450 kgs (990 lbs)	EQPU輪 EQPU	1145-08-81-1	1145-08-81-2	1145-08-81-4			
	450 kgs (990 lbs)	VPU輪 VPU	1145-08-82-1	1145-08-82-2	1145-08-82-4			
	550 kgs (1210 lbs)	VQPU輪 VQPU	1145-08-83-1	1145-08-83-2	1145-08-83-4			