


NX系列

手動液壓拖板車尼龍輪

	輪面硬度		70° Shore A
	溫度範圍		-25°C to +80°C
	滾動順暢		優秀
	音量		良好
	保護地板		良好

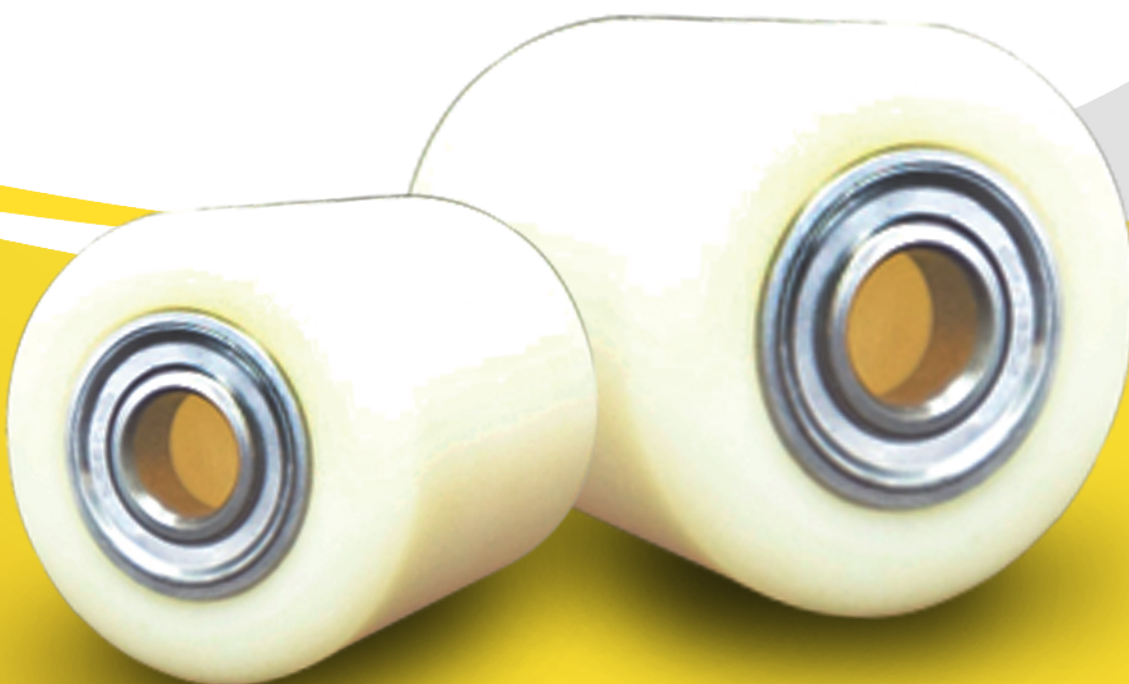

輪面

由高品質耐衝擊尼龍製成，輪面硬度70°shore D。
得勝尼龍輪提供良好的地板保護作用，低阻力和極
好的抗磨性。顏色：本色

特色

- 抗化學、溶劑及侵蝕
- 適用環境溫度：-25°C~+80°C
- 如果使用溫度超過+35°C，載重會減少
- 在正常使用情況下，無需維修



品號	輪徑 (D)【mm】	輪寬 (T2)【mm】	載重 【kg(lbs)】	軸承內徑 Ø(d)【mm】	中寬 (T1)【mm】	輪面	軸承
12020703250171	80	60	700kgs / 1543lbs	25	60	平面	滾珠軸承
12020703280171	80	70	700kgs / 1543lbs	20	76		
12020703300171	80	74	700kgs / 1543lbs	20	80		
12020703200171	82	54	600kgs / 1323lbs	20	60		
12020703250271	82	66	680kgs / 1499lbs	20	66		
12020703280271	82	70	800kgs / 1764lbs	20	70		
12020703300271	82	80	800kgs / 1764lbs	20	82		
12020703350171	82	88	900kgs / 1984lbs	20	90		
12020703350271	82	90	900kgs / 1984lbs	20	90		
12020703350371	82	91	900kgs / 1984lbs	20	93		
12020703350471	82	91	900kgs / 1984lbs	25	97		
12020703380171	82	93	900kgs / 1984lbs	20	95		
12020703400171	82	98	900kgs / 1984lbs	20	100		
12020753250171	85	60	650kgs / 1433lbs	20	60		
12020753250271	85	65	650kgs / 1433lbs	20	65		
12020753280171	85	70	700kgs / 1543lbs	20	70		
12020753300171	85	75	700kgs / 1543lbs	20	75		
12020753300271	85	80	750kgs / 1653lbs	20	80		
12020753350171	85	85	800kgs / 1764lbs	20	85		
12020753350271	85	90	850kgs / 1874lbs	20	90		
12020753380171	85	95	900kgs / 1984lbs	20	95		
12020753380271	85	95	900kgs / 1984lbs	20	97		
12020753400171	85	100	900kgs / 2094lbs	20	100		
12020753400271	85	100	900kgs / 2094lbs	20	102		