




1162 Series

重型

大象脚轮系列(单轮)

Super Heavy Duty Casters (Single Wheel)

- 得胜大象脚轮是为了应付产业上最严苛的使用环境而设计的，可以承载极高荷重及有效提高延长脚轮使用寿命。
- Ultimate super heavy duty caster built to meet the most demanding industrial application. Equipped with Dersheng's Xtremethane PU wheel, this caster is designed to carry heavy load for a long period of product life.

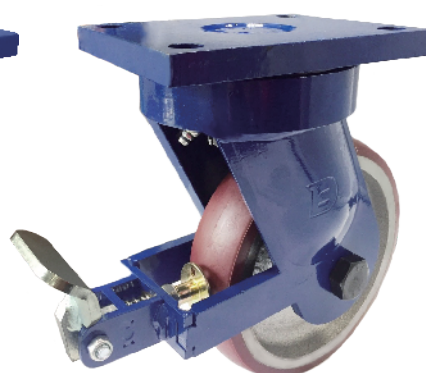

» 特色区 Features




斜珠轴承

此斜珠轴承用于架子上，其轴承之内轮及外轮的轨道面与轮子的转动面都经过设计，使其具有大的负荷能力，用于重负荷及冲击负荷最适合，且拆装容易。

The tapered bearing used in the horn provides strength to carry extra load, and absorb shock impact. Also, the tapered bearing is easy to be disassembled for maintenance or replacement purpose.



KD刹
Swivel W/KD Lock Brake



轮子可附金属防尘盖(供选择)
Metal Thread Guard (optional)

» 轮子选项 Wheel Options



铁芯VXPU
XPU on Iron Core



铁芯XPU
XPU on Iron Core



斜珠轴承
Tapered Bearing



» 底板规格 TOP PLATE SIZE AND BOLT HOLE SPACING

编号 Suffix	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安装尼帽尺寸 Attaching Bolt Size
6" 8" 10"	175 x 140mm (6-7/8" x 5-1/2")	140 x 105mm (5-1/2" x 4-1/8")	16 mm (5/8")
10" 12"	255 x 200mm (10-1/16" x 7-7/8")	210 x 160mm (8-1/4" x 6-5/16")	20 mm (3/4")

 轮径x轮宽 DiameterxWidth	 载重 Load	 材质 Material	 型号 Item No.			 轴承 Bearing	 总高 Overall Height	 回旋半径 Swivel radius
			固定 Fixed	活动 Swivel	刹车 Brake			
150mm x 42mm (6" x 1-5/8")	650 kgs (1435 lbs)	铁芯VXPU(圆弧) XPU on Iron Core(Round)	1162-06-91-1	1162-06-91-2	1162-06-91-4	斜珠轴承 Tampered Bearing	230mm (9-1/16")	活动 126mm KD刹 132mm Swivel 126mm Swivel W/KD lock brake 132mm
200mm x 50mm (8" x 2")	1000 kgs (2200 lbs)	铁芯VXPU(圆弧) XPU on Iron Core(Round)	1162-08-91-1	1162-08-91-2	1162-08-91-4	斜珠轴承 Tampered Bearing	280mm (11-1/32")	活动 163mm KD刹 163mm Swivel 163mm Swivel W/KD lock brake 163mm
200mm x 66mm (8" x 2-9/16")	1300 kgs (2870 lbs)	铁芯XPU(圆弧) XPU on Iron Core(Round)	1162-08-96-1	1162-08-96-2	1162-08-96-4	斜珠轴承 Tampered Bearing	280mm (11-1/32")	活动 165mm KD刹 165mm Swivel 165mm Swivel W/KD lock brake 165mm
250mm x 62mm (10" x 2-7/16")	1600 kgs (3530 lbs)	铁芯VXPU(圆弧) XPU on Iron Core(Round)	1162-10-91-1	1162-10-91-2	1162-10-91-4	斜珠轴承 Tampered Bearing	330mm (13")	活动 189mm KD刹 189mm Swivel 189mm Swivel W/KD lock brake 189mm
250mm x 80mm (10" x 3-1/8")	2000 kgs (4410 lbs)	铁芯VXPU(平面) XPU on Iron Core(Flat)	1162-10-91(80)-1	1162-10-91(80)-2	1162-10-91(80)-4	斜珠轴承 Tampered Bearing	330mm (13")	活动 198mm KD刹 198mm Swivel 198mm Swivel W/KD lock brake 198mm
300mm x 90mm (12" x 3-17/32")	2700 kgs (6000 lbs)	铁芯VXPU(平面) XPU on Iron Core(Flat)	1162-12-91-1	1162-12-91-2	1162-12-91-4	斜珠轴承 Tampered Bearing	380mm (14-31/32")	活动 222mm KD刹 222mm Swivel 222mm Swivel W/KD lock brake 222mm